

❄️ 272 kg/ 24h

Granular ice makers / Granular ice makers:
B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B305S ALLGAS
220-240/50/1
Granular ice makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH



WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter



OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

L x P x H (mm)



570 x 545 x 535



650 x 600 x 690

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

RESIDUAL WATER
CONTENUTO
ACQUA



Ghiaccio FLAKER

8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	272 599	259 571	247 544	221 487
21° 70°	268 591	255 562	242 533	217 478
32° 90°	224 494	212 467	199 439	174 383
38° 100°	213 469	200 441	187 412	162 357

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	240 529	228 503	221 487	200 441
21° 70°	235 518	224 494	216 476	197 434
32° 90°	232 511	218 480	207 456	190 419
38° 100°	220 485	208 458	199 439	182 401

TECHNICAL DATA



+°C
-°C



W



W



21°C
32°C



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

B305S AG 220-240/50/1N



1388

950

10

10.9

8.4

57

64

B305S AG 220-240/50/1N



1388

880

10

10.1

63.7

57

64

272 kg/ 24h

Granular ice makers / Granular ice makers:


B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B305S ALLGAS

220-240/50/1

Granular ice makers

DIMENSIONS

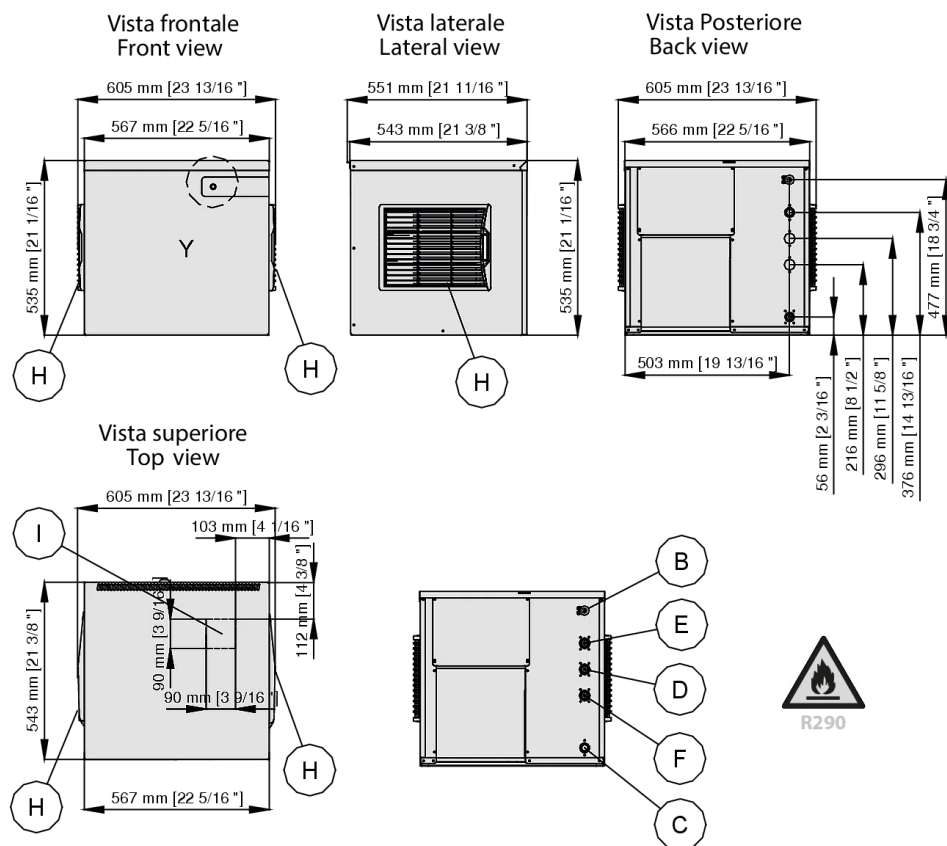


- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G
- H** Filtro aria
Air filter
- I** Foro caduta ghiaccio
Ice drop area



MyICE


Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

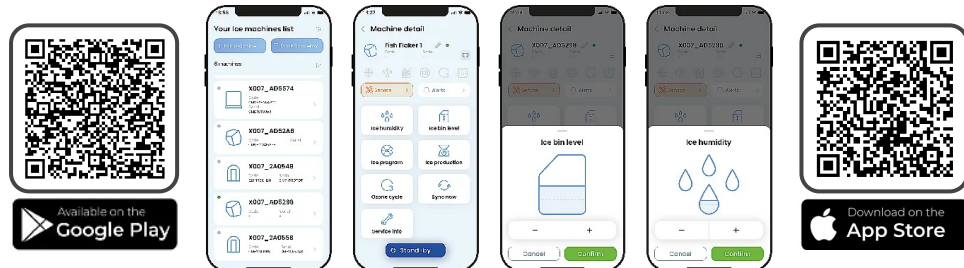

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2594 W
Air Volume	300 m³/h