

 **90 kg/ 24h**

Granular ice makers / Granular ice makers:

B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B95C ALLGAS

220-240/50/1

Granular ice makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH



WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Removable and washable air filter
- Frontal air intake and exhaust



OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

18 kg

DIMENSIONS

L x P x H (mm)



500 x 597 x 694



560 x 650 x 970

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

RESIDUAL WATER

CONTENUTO

ACQUA



Ghiaccio FLAKER

8%

ICE PRODUCTION

kg/24h

lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	90 198	88 194	84 185	76 168
21° 70°	77 170	75 165	71 156	64 141
32° 90°	64 141	62 137	58 128	50 110
38° 100°	58 128	56 123	54 119	48 106

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	84 185	82 181	78 172	70 154
21° 70°	80 176	78 172	73 161	66 145
32° 90°	76 168	74 163	70 154	62 137
38° 100°	70 154	68 150	65 143	58 128

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

B95C AG 220-240/50/1N



346

410

10

16

2.5

48

55

B95C AG 220-240/50/1N



346

360

10


11

36


48

55

DIMENSIONS

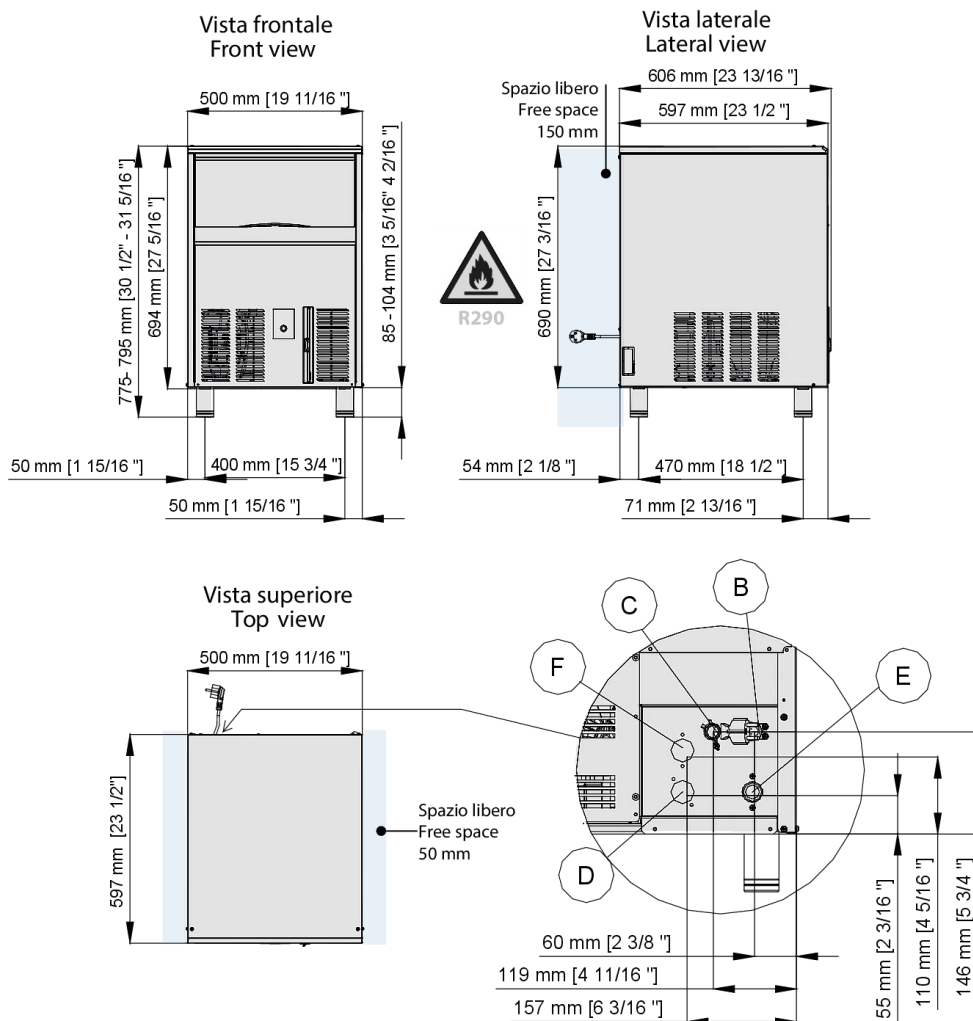

- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G




Schuko plug
Spina schuko



Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

MyICE


Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	985 W
Air Volume	300 m³/h