

 38 kg/ 24h

Ice makers - Spray System / Ice makers - Spray System:
C28 - C28 + - C38 - C38L - C46 - C46L - C54 - C70 - C70L - C90 - C90L

C38L ALL GAS
220-240/50/1
Ice makers - Spray System

-  RAINBOW TECHNOLOGY
-  USB
-  PROGRAMMED OZONE CYCLE
-  SCHEDULED PRODUCTION
-  TOUCH CONTROL
-  BLUETOOTH
-  WI-FI
-  SAFE ICE

FEATURES

- Steel casing
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report



DEPOSIT

11,5 kg
287 pcs

OPTIONAL

- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Feet kit 100mm

DIMENSIONS

	L x P x H (mm)
	400 x 540 x 704
	460 x 600 x 850

VOLTAGE

 220-240/50/1
220/60/1

GAS

 R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Cubetto PIENO 40 g -38/46 45x 46x 39mm	20	40 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	38 84	36 79	34 75	30 66
21° 70°	34 75	32 71	30 66	27 60
32° 90°	30 66	28 62	26 57	23 51
38° 100°	23 51	22 48	21 46	19 42

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	36 79	34 75	32 71	28 62
21° 70°	34 75	32 71	30 66	26 57
32° 90°	33 73	31 68	29 64	25 55
38° 100°	29 64	28 62	26 57	21 46


TECHNICAL DATA

				 +°C -°C		 W		 W	 21°C 30°C		
				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l/ h	Kg	Kg
C38L	A AG	220-240/50/1N		670	370	10	29	3.2	40	34	
C38L	W AG	220-240/50/1N		670	290	10	20.3	43.2	40	34	


DIMENSIONS

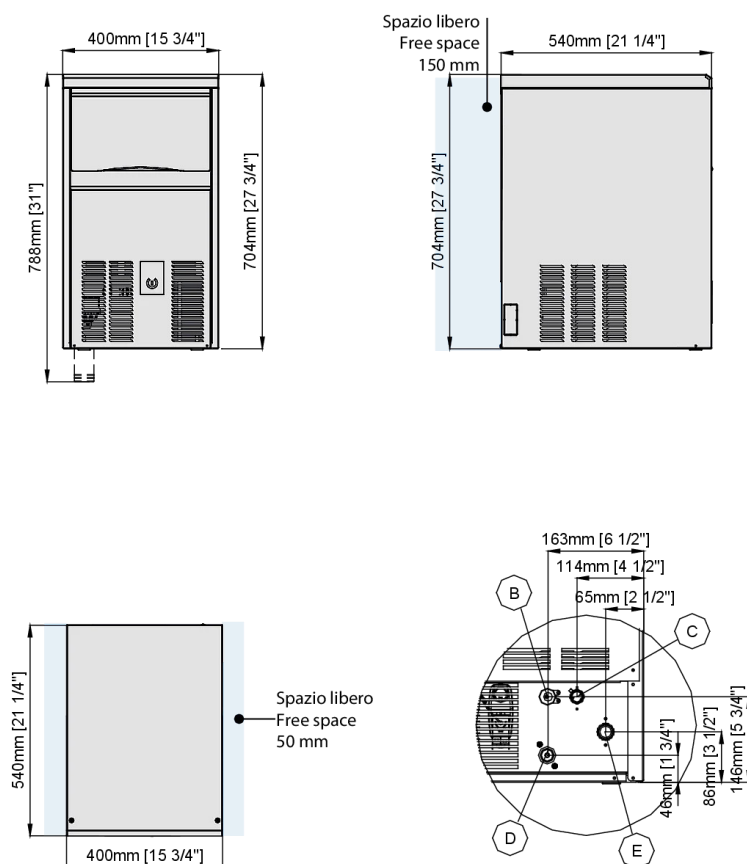

- B** Electrical cable supply
Ingresso alimentazione
elettrica
- C** Water outlet connection
Attacco scarico acqua Ø
20 mm
- D** Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm
- E** Water inlet connection / Attacco
entrata acqua - 3/4" G



Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm


(Opzionali-optional)

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

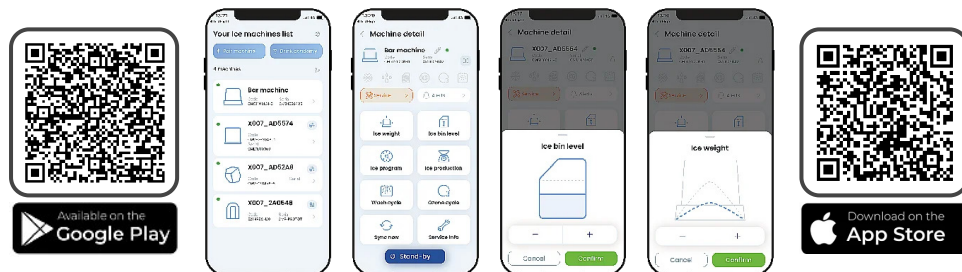

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	979 W
Air Volume	185 m ³ /h