

## 150 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K150 ALLGAS

220-240/50/1

Palette Ice Makers



### FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm

### OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection



### DEPOSIT

67 kg  
3190 pcs

### DIMENSIONS

L x P x H (mm)



920 x 650 x 1280



970 x 700 x 1370

### VOLTAGE



220-240/50/1  
220/60/1

### GAS



R290  
GWP 3

### ICE TYPE

|                                                                                     |                | PCS / CYCLE | WEIGHT ICE       |
|-------------------------------------------------------------------------------------|----------------|-------------|------------------|
|                                                                                     |                | PZ / CICLO  | PESO<br>GHIACCIO |
|  | Cubetto        |             |                  |
|                                                                                     | CAVO 150       | 90          | 21 g             |
|                                                                                     | 29x 41x 32.5mm |             |                  |

### ICE PRODUCTION

kg/24h  
lbs/24h

Air cooled unit



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 150<br>331               | 146<br>322 | 138<br>304 | 124<br>273 |
| 21°<br>70°              | 142<br>313               | 137<br>302 | 130<br>287 | 118<br>260 |
| 32°<br>90°              | 123<br>271               | 120<br>264 | 115<br>253 | 105<br>231 |
| 38°<br>100°             | 111<br>245               | 107<br>236 | 102<br>225 | 94<br>207  |

Water cooling




| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 151<br>333               | 147<br>324 | 144<br>317 | 123<br>271 |
| 21°<br>70°              | 149<br>328               | 146<br>322 | 143<br>315 | 125<br>276 |
| 32°<br>90°              | 145<br>320               | 143<br>315 | 140<br>309 | 123<br>271 |
| 38°<br>100°             | 140<br>309               | 139<br>306 | 138<br>304 | 118<br>260 |

### TECHNICAL DATA



|      |      |                  |  |  |  |  |  |  |  |  |
|------|------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|      |      |                  | cond                                                                                | comp. W                                                                             | ABS. W                                                                              | Fuse                                                                                | Kwh/100Kg                                                                           | I / h                                                                               | Kg                                                                                  | Kg                                                                                    |
| K150 | A AG | 220-240V/1N/50Hz |  | 1536                                                                                | 850                                                                                 | 10                                                                                  | 17.4                                                                                | 15.5                                                                                | 105                                                                                 | 116                                                                                   |
| K150 | W AG | 220-240V/1N/50Hz |  | 1536                                                                                | 810                                                                                 | 10                                                                                  | 11                                                                                  | 122                                                                                 | 105                                                                                 | 116                                                                                   |
| K150 | A AG | 220-240V/1N/60Hz |  | 1651                                                                                | 1100                                                                                | 10                                                                                  | 20.1                                                                                | 17.8                                                                                | 105                                                                                 | 116                                                                                   |

### DIMENSIONS

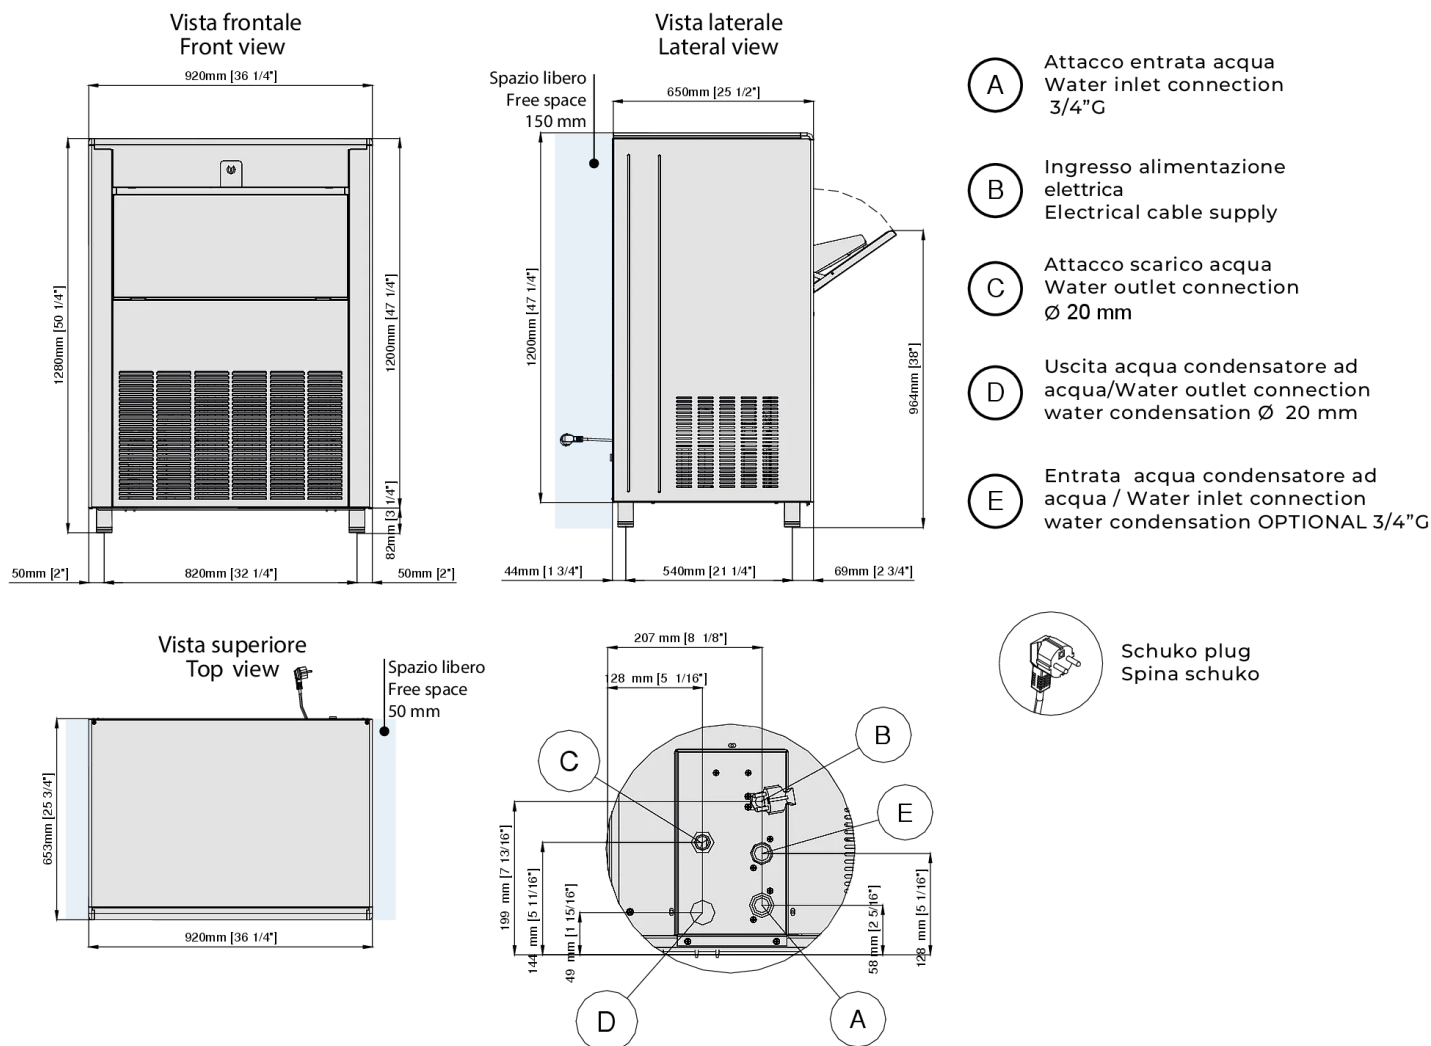


### MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



### TOUCH CONTROL



### Operating conditions

|                 | Min           | Max             |
|-----------------|---------------|-----------------|
| Temp. Ambient   | 10°C          | 40°C            |
| Temp. Water Ice | 5°            | 35°             |
| Press. Water    | 1 Bar (14psi) | 10 Bar (140psi) |
| Conducib.water  | 20 microS     | 500 microS      |
| Power Supply    | -10%          | +10%            |

Capacitive Stand-by / Start button  
(LED continuously changing colors from white to red)

|               |           |
|---------------|-----------|
| Heat expelled | 4009 W    |
| Air Volume    | 1100 m³/h |