

## 23 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K23N ALLGAS

220-240/50/1

Palette Ice Makers



### FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

### OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



### DEPOSIT

5 kg  
238 pcs

### DIMENSIONS

L x P x H (mm)



340 x 545 x 620



460 x 600 x 850

### VOLTAGE



220-240/50/1  
220/60/1

### GAS



R290  
GWP 3

### ICE TYPE

|                                                                                     | PCS / CYCLE<br>PZ / CICLO                   | WEIGHT ICE<br>PESO<br>GHIACCIO |      |
|-------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------|------|
|                                                                                     |                                             |                                |      |
|  | Cubetto<br>CAVO 23n-23-25<br>29x 41x 32.5mm | 15                             | 21 g |

### ICE PRODUCTION

kg/24h  
lbs/24h

Air cooled unit



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
|                         | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 23<br>51                 | 22<br>48   | 21<br>46   | 18<br>40   |
| 21°<br>70°              | 21<br>46                 | 20<br>44   | 18<br>40   | 16<br>35   |
| 32°<br>90°              | 17<br>37                 | 16<br>35   | 16<br>35   | 12<br>26   |
| 38°<br>100°             | 13<br>29                 | 12<br>26   | 11<br>24   | 10<br>22   |

Water cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
|                         | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 23<br>51                 | 21<br>46   | 21<br>46   | 17<br>37   |
| 21°<br>70°              | 21<br>46                 | 20<br>44   | 20<br>44   | 16<br>35   |
| 32°<br>90°              | 20<br>44                 | 19<br>42   | 19<br>42   | 15<br>33   |
| 38°<br>100°             | 18<br>40                 | 17<br>37   | 17<br>37   | 14<br>31   |

### TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

K23n A AG 220-240V/1N/50Hz



354

220

10

25.8

2.1

29

36

K23n W AG 220-240V/1N/50Hz



354

210

10


19.8

28.5

29

36

### DIMENSIONS

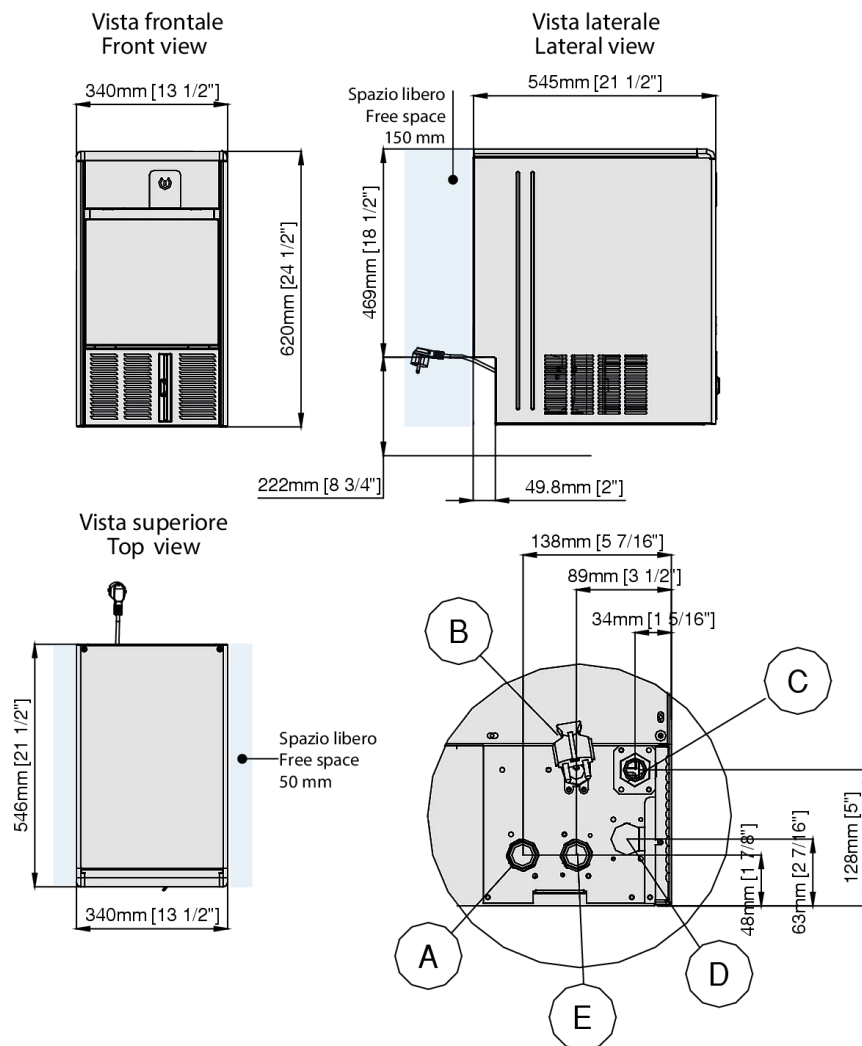

Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G



Ingresso alimentazione elettrica / Electrical cable supply




Attacco scarico acqua / Water outlet connection Ø 20 mm



Uscita acqua condensatore ad acqua / Water outlet connection water condensation Ø 20 mm



Attacco entrata acqua / Water inlet connection 3/4"G



Schuko plug  
Spina schuko





Kit 4 Feet  
Kit 4 piedini  
Ø50mm H100-120 mm  
(optional)

### MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone




Available on the  
Google Play



Download on the  
App Store

### TOUCH CONTROL



### Operating conditions

|                 | Min           | Max             |
|-----------------|---------------|-----------------|
| Temp. Ambient   | 10°C          | 40°C            |
| Temp. Water Ice | 5°            | 35°             |
| Press. Water    | 1 Bar (14psi) | 10 Bar (140psi) |
| Conducib.water  | 20 microS     | 500 microS      |
| Power Supply    | -10%          | +10%            |

Capacitive Stand-by / Start button  
(LED continuously changing colors from white to red)

|               |          |
|---------------|----------|
| Heat expelled | 514 W    |
| Air Volume    | 110 m³/h |