

25 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K25 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

10kg
476 pcs

DIMENSIONS

L x P x H (mm)



400 x 545 x 690



460 x 600 x 850

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO	
 Cubetto CAVO 23n-23-25 29x 41x 32.5mm	15	21 g	

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	°C / °F	10° 50°	15° 59°	21° 70°
10° 50°		25 55	24 53	23 51
21° 70°		21 46	20 44	19 42
32° 90°		17 37	16 35	15 33
38° 100°		14 31	13 29	13 29

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	°C / °F	10° 50°	15° 59°	21° 70°
10° 50°		24 53	23 51	21 46
21° 70°		22 48	21 46	20 44
32° 90°		20 44	19 42	19 42
38° 100°		19 42	18 40	18 40

TECHNICAL DATA

									
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg	
K25 A AG	220-240V/1N/50Hz		354	190	10	24.1	2.23	33	39
K25 W AG	220-240V/1N/50Hz		354	190	10	15.5	26.3	32	38

DIMENSIONS


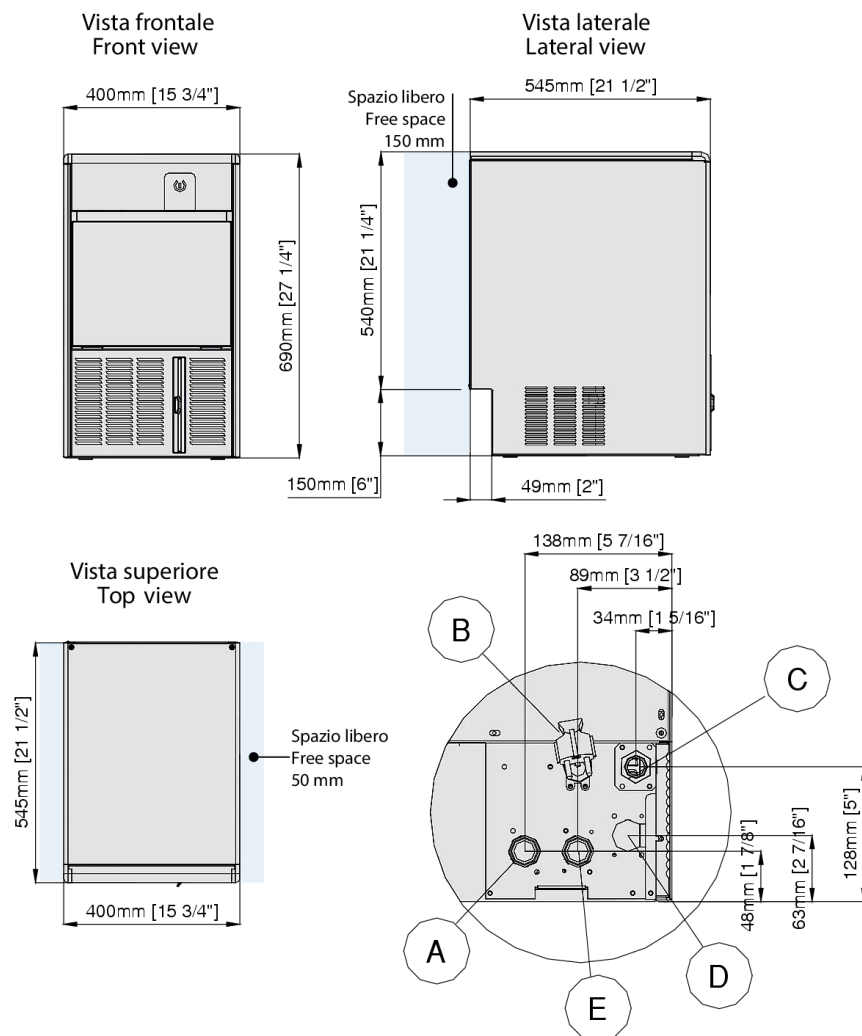


- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation Ø 20 mm
- E** Attacco entrata acqua / Water inlet connection 3/4"G




MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	585 W
Air Volume	300 m³/h