

45 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K45 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

16 kg
762 pcs

DIMENSIONS

L x P x H (mm)



500 x 600 x 693



560 x 660 x 850

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO	
 Cubetto CAVO 45-50-62 29x 41x 32.5mm	35	21 g	

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	45 99	44 97	42 93	39 86
21° 70°	41 90	40 88	39 86	35 77
32° 90°	34 75	33 73	32 71	30 66
38° 100°	28 62	26 57	25 55	23 51

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	46 101	45 99	44 97	42 93
21° 70°	45 99	44 97	43 95	40 88
32° 90°	44 97	43 95	42 93	39 86
38° 100°	38 84	37 82	36 79	35 77

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg


I / h

Kg

Kg



K45	A AG	220-240V/1N/50Hz		585	240	10	15.1	4	41	48
K45	W AG	220-240V/1N/50Hz		585	220	10	8.6	44.4	41	48

DIMENSIONS

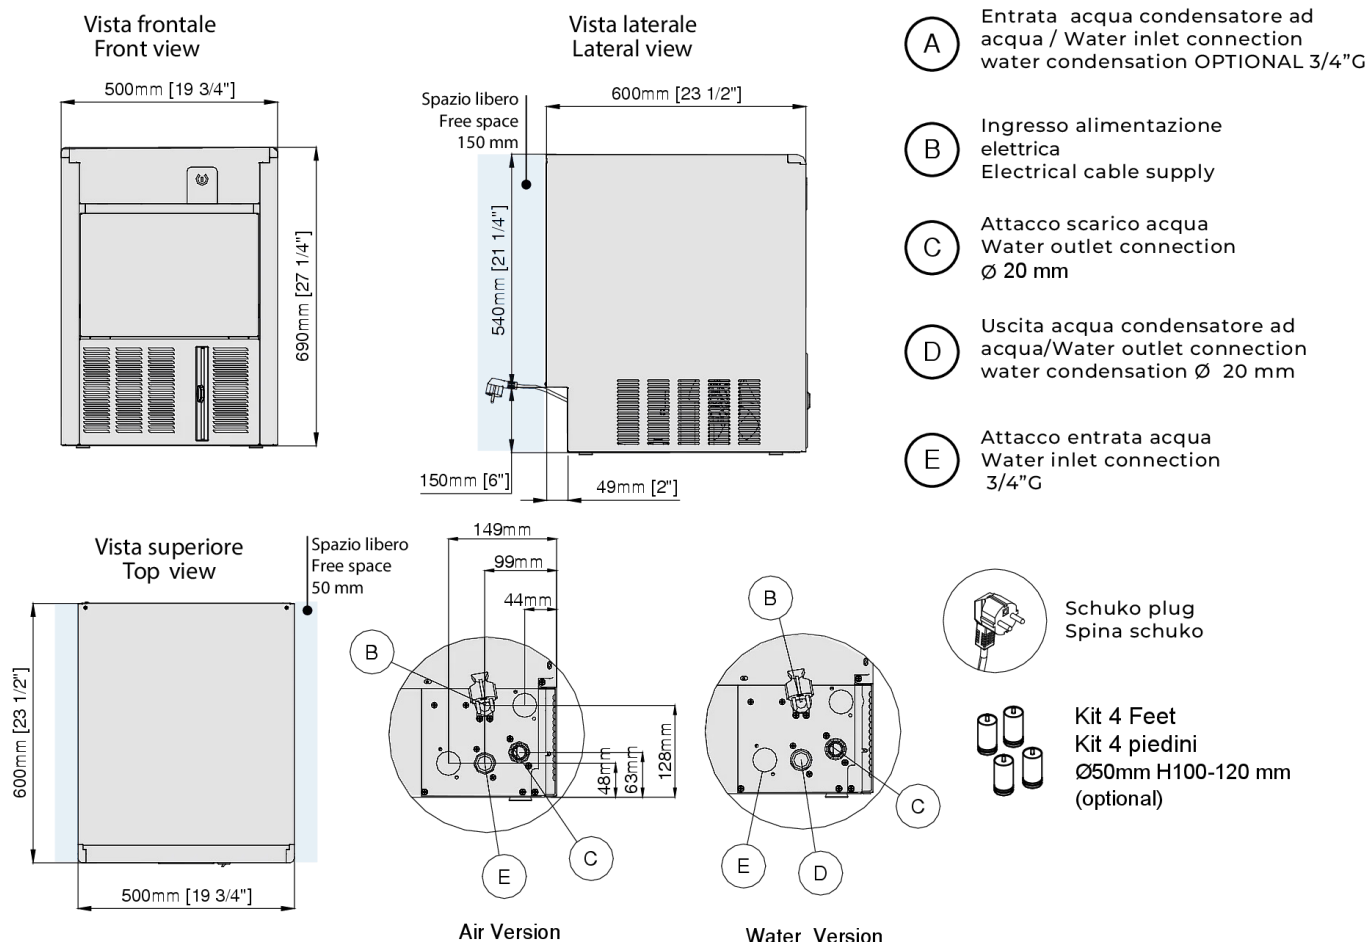


MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	871 W
Air Volume	300 m³/h