

50 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K50 ALLGAS
220-240/50/1
Palette Ice Makers


- RAINBOW TECHNOLOGY
- USB
- PROGRAMMED OZONE CYCLE
- SCHEDULED PRODUCTION
- TOUCH CONTROL
- BLUETOOTH
- WI-FI
- SAFE ICE

FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm

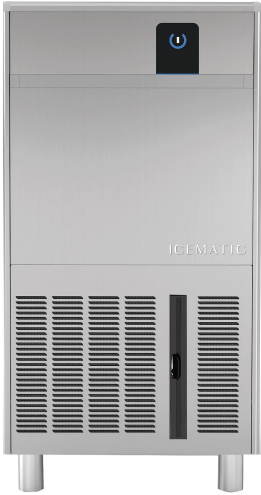

DEPOSIT

21 kg
1000 pcs

DIMENSIONS

	L x P x H (mm)
	500 x 585 x 956
	560 x 640 x 1050

VOLTAGE

	220-240/50/1 220/60/1
--	--------------------------

GAS

	R290 GWP 3
--	---------------

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Cubetto CAVO 45-50-62 29x 41x 32.5mm	35	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	50 110	48 105	46 101	43 94
21° 70°	46 101	45 99	43 94	38 83
32° 90°	39 85	38 83	37 81	34 74
38° 100°	34 74	32 70	31 68	28 61


Water cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	50 110	48 106	46 101	43 95
21° 70°	46 101	45 99	43 95	38 84
32° 90°	45 99	44 97	42 93	37 82
38° 100°	42 93	41 90	40 88	34 75


TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
K50 A AG 220-240V/1N/50Hz			653	310	10	16.4	5.27	51	58
K50 W AG 220-240V/1N/50Hz			653	280	10	10.8	46.2	51	58

DIMENSIONS

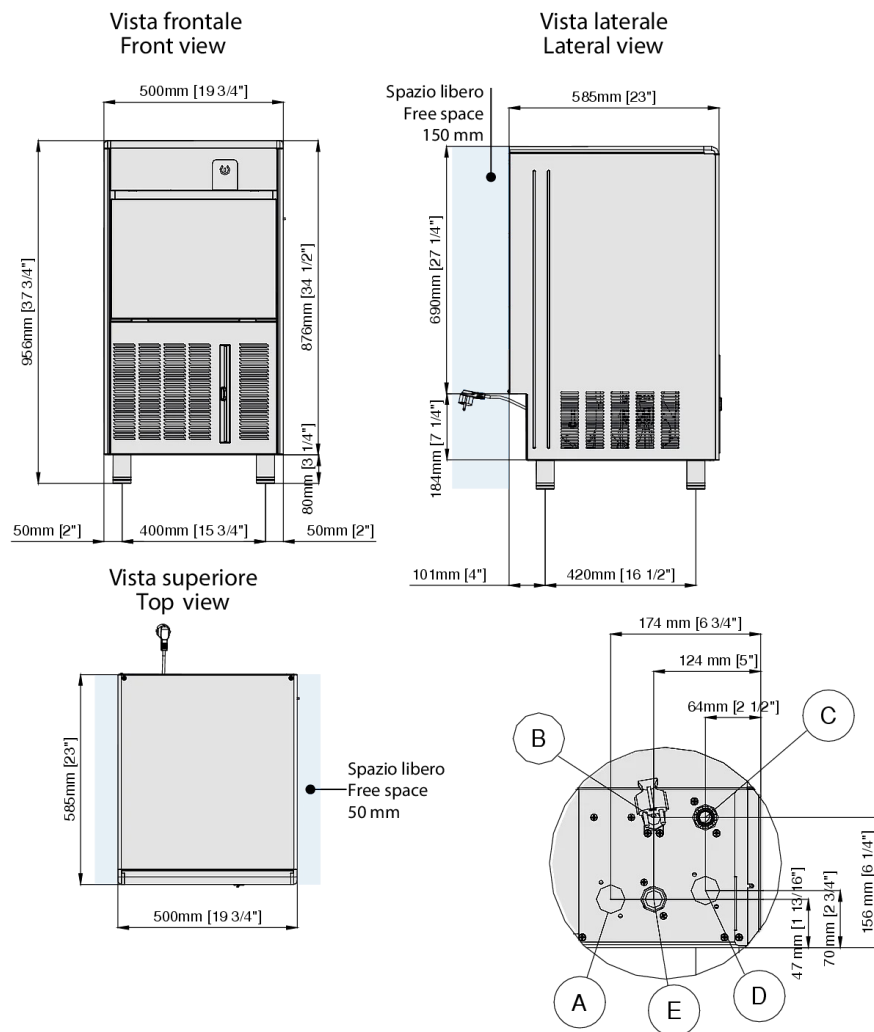

- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation Ø 20 mm
- E** Attacco entrata acqua / Water inlet connection 3/4"G





Schuko plug
Spina schuko

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	937 W
Air Volume	500 m³/h