

## 80 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K80 ALLGAS

220-240/50/1

Palette Ice Makers



### FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

### OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



### DEPOSIT

36 kg  
1714 pcs

### DIMENSIONS

L x P x H (mm)



700 x 585 x 956



760 x 640 x 1050

### VOLTAGE



220-240/50/1  
220/60/1

### GAS



R290  
GWP 3

### ICE TYPE

|  |                                         | PCS / CYCLE | WEIGHT ICE       |
|--|-----------------------------------------|-------------|------------------|
|  |                                         | PZ / CICLO  | PESO<br>GHIACCIO |
|  | Cubetto<br>CAVO 80-95<br>29x 41x 32.5mm | 60          | 21 g             |

### ICE PRODUCTION

kg/24h  
lbs/24h

Air cooled unit



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 80<br>176                | 77<br>170  | 74<br>163  | 65<br>143  |
| 21°<br>70°              | 73<br>161                | 71<br>156  | 68<br>150  | 60<br>132  |
| 32°<br>90°              | 57<br>126                | 56<br>123  | 54<br>119  | 48<br>106  |
| 38°<br>100°             | 47<br>104                | 46<br>101  | 44<br>97   | 40<br>88   |

Water cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 81<br>179                | 78<br>172  | 75<br>165  | 66<br>145  |
| 21°<br>70°              | 77<br>170                | 75<br>165  | 70<br>154  | 64<br>141  |
| 32°<br>90°              | 74<br>163                | 72<br>159  | 68<br>150  | 61<br>134  |
| 38°<br>100°             | 70<br>154                | 68<br>150  | 64<br>141  | 56<br>123  |

### TECHNICAL DATA



cond



comp. W



ABS. W



Fuse



Kwh/100Kg



l / h




Kg



Kg

|     |      |                  |  |      |     |    |      |      |    |    |
|-----|------|------------------|--|------|-----|----|------|------|----|----|
| K80 | A AG | 220-240V/1N/50Hz |  | 1054 | 510 | 10 | 19.8 | 6.57 | 56 | 65 |
| K80 | W AG | 220-240V/1N/50Hz |  | 1054 | 450 | 10 | 12.1 | 52.6 | 56 | 65 |

### DIMENSIONS


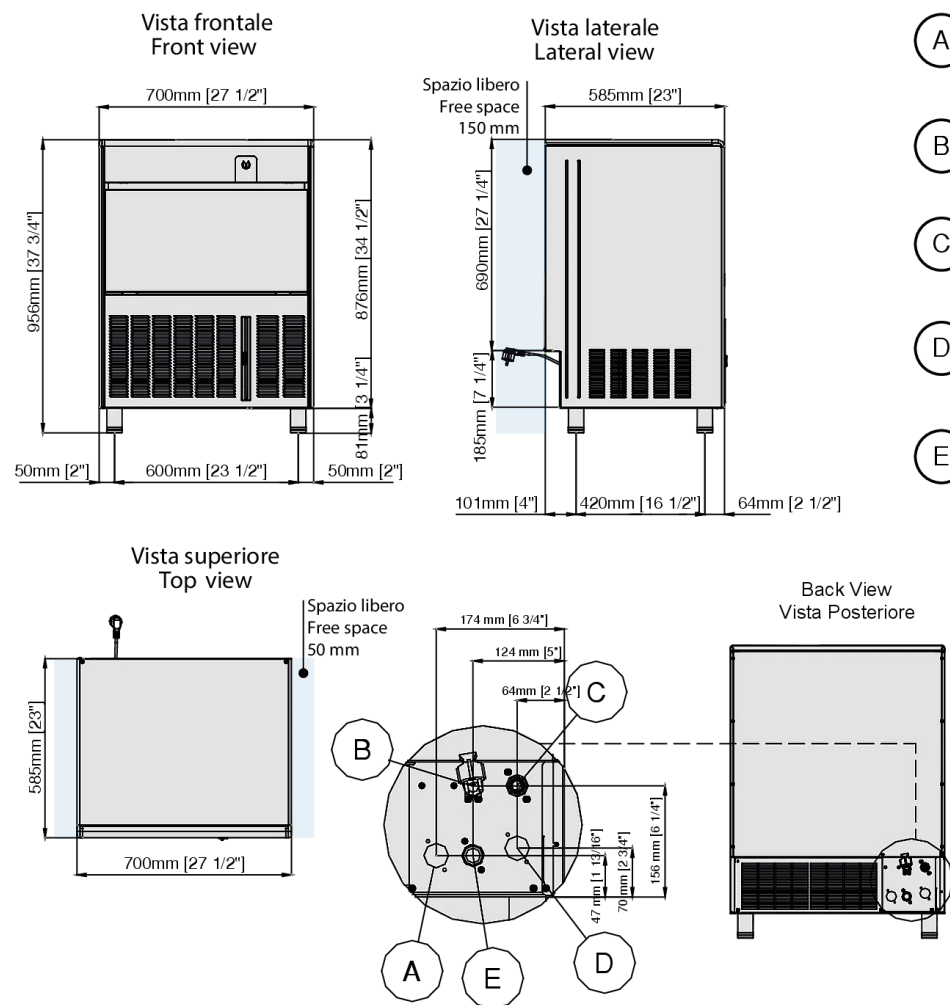


- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"C
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation Ø 20 mm
- E** Attacco entrata acqua / Water inlet connection 3/4"C




### MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



### TOUCH CONTROL



#### Operating conditions

|                 | Min           | Max             |
|-----------------|---------------|-----------------|
| Temp. Ambient   | 10°C          | 40°C            |
| Temp. Water Ice | 5°            | 35°             |
| Press. Water    | 1 Bar (14psi) | 10 Bar (140psi) |
| Conducib.water  | 20 microS     | 500 microS      |
| Power Supply    | -10%          | +10%            |

Capacitive Stand-by / Start button  
(LED continuously changing colors from white to red)

|               |          |
|---------------|----------|
| Heat expelled | 1537 W   |
| Air Volume    | 500 m³/h |