

 190 kg/ 24h

Nugget ice makers / Nugget ice makers:
TD200.10 - TD120.10

TD200.10 ALLGAS

220-240/50/1

Nugget ice makers

FEATURES

- Steel casing
- Air and water condensation
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Programmable ice production
- Removable and washable air filter
- Side suction and upper air exhaust



OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection

DEPOSIT

10,5 kg

DIMENSIONS

L x P x H (mm)

 467 x 600 x 1000

 545 x 640 x 1135

VOLTAGE

 220-240/50/1
220/60/1

GAS

 R290
GWP 3

ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
 Cubetto Nugget M 15.8x 15x 7.7mm	1.1 g	8%
 Cubetto Nugget L 25x 15x 7.7mm	1.6 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	190 419	178 392	175 386	162 357
21° 70°	171 377	163 359	157 346	144 317
32° 90°	152 335	146 322	140 309	126 278
38° 100°	144 317	139 306	132 291	120 264

TECHNICAL DATA

									
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
TD200.10 AG 220-240/50/1N		878	900	10	10.7	5.8	88	96	

190 kg/ 24h

Nugget ice makers / Nugget ice makers:


TD200.10 - TD120.10

TD200.10 ALLGAS


220-240/50/1

Nugget ice makers

DIMENSIONS

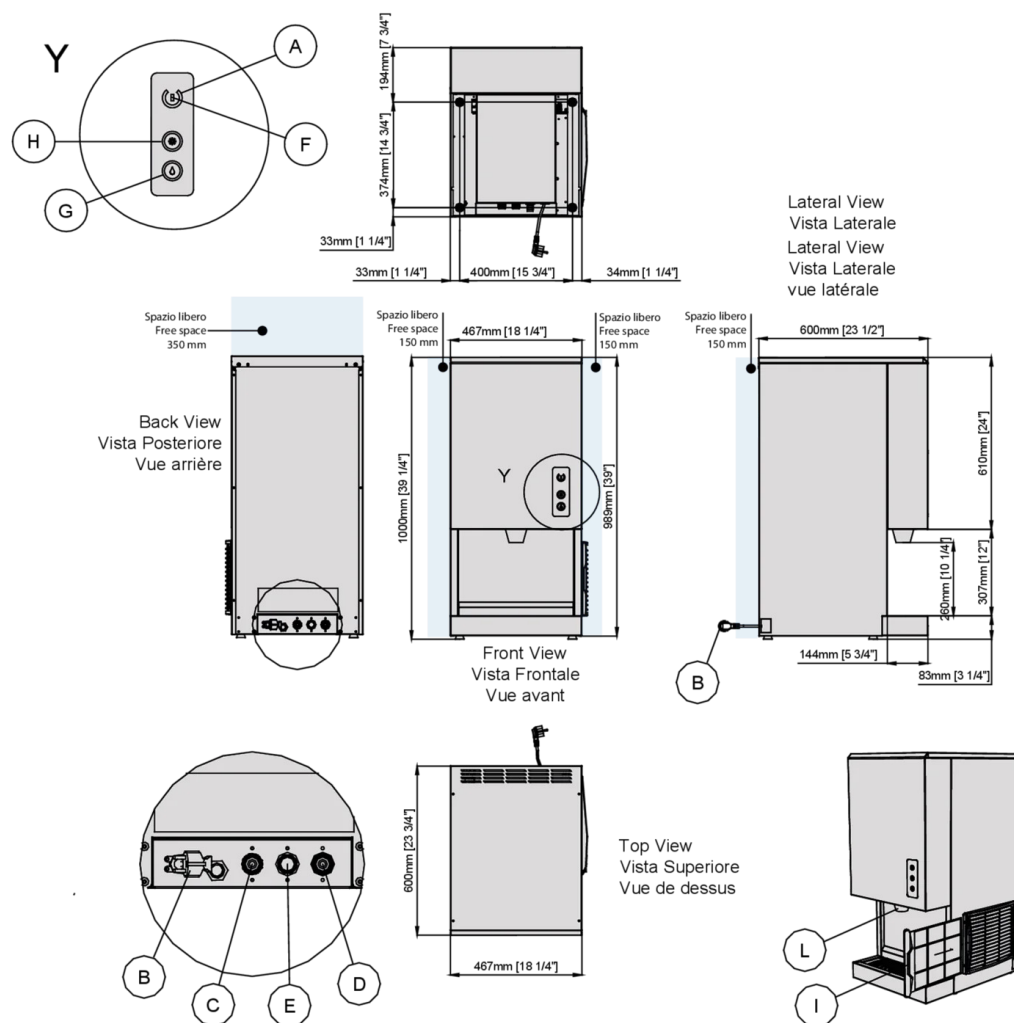




- (A) Switch Touch START-STANDBY/ Interruttore Touch di Avvio-Standby - Commutateur tactile START-STANDBY
- (B) Electrical cable supply / Ingresso alimentazione elettrica / Entrée d'alimentation électrique
- (C) Water outlet connection / Attacco scarico acqua Ø 20 mm / Raccord d'évacuation d'eau Ø 20 mm
- (D) Water outlet connection water condensation / Uscita acqua condensatore ad acqua Ø 20 mm / Sortie d'eau condenseur à eau Ø 20 mm
- (E) Water inlet connection / Attacco entrata acqua - 3/4" gas / Connexion entrée d'eau - 3/4" gaz
- (F) Led white-red regulation weight ice cube and set T° storage probe / Led bianco-rosso regolazione peso cubetto e set temperatura sonda deposito - Led blanc-rouge pour le réglage du poids du cube et le réglage de la température de la sonde de stockage
- (G) Keys for manual water dispensing / Tasto per erogazione manuale acqua
- (H) Button for manual ice dispensing / Tasto per prelievo manuale ghiaccio
- (I) Condenser air filter / Filtro aria condensatore
- (L) Ice outlet / Uscita ghiaccio

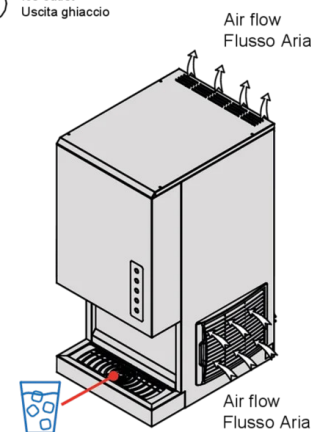

Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Heat expelled	2905 W
Air Volume	300 m³/h