

130 kg/ 24h

Granular ice makers / Granular ice makers:
B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B130C ALLGAS
220-240/50/1
Granular ice makers

- USB
- PROGRAMMED
OZONE CYCLE
- SCHEDULED
PRODUCTION
- TOUCH
CONTROL
- BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Removable and washable air filter
- Frontal air intake and exhaust



OPTIONAL

- Programmable sanitizing cycle with ozone

RECOMMENDED DEPOSITS

18 kg

DIMENSIONS

L x P x H (mm)



500 x 597 x 694



560 x 650 x 970

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

RESIDUAL WATER CONTENUTO ACQUA	
	Flake Ice
	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	130 287	125 276	121 267	112 247
21° 70°	118 260	116 256	112 247	103 227
32° 90°	98 216	95 209	91 201	85 187
38° 100°	83 183	81 179	77 170	71 156

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	118 260	115 253	106 234	95 209
21° 70°	112 247	110 242	100 220	90 198
32° 90°	106 234	104 229	94 207	84 185
38° 100°	97 214	96 212	86 190	79 174

TECHNICAL DATA

				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
B130C	AG	220-240/50/1N		634	570	10	14.2	4	50	57	
B130C	AG	220-240/50/1N		634	500	10	12.2	40	50	57	

130 kg/ 24h

Granular ice makers / Granular ice makers:


B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B130C ALLGAS


220-240/50/1

Granular ice makers

DIMENSIONS

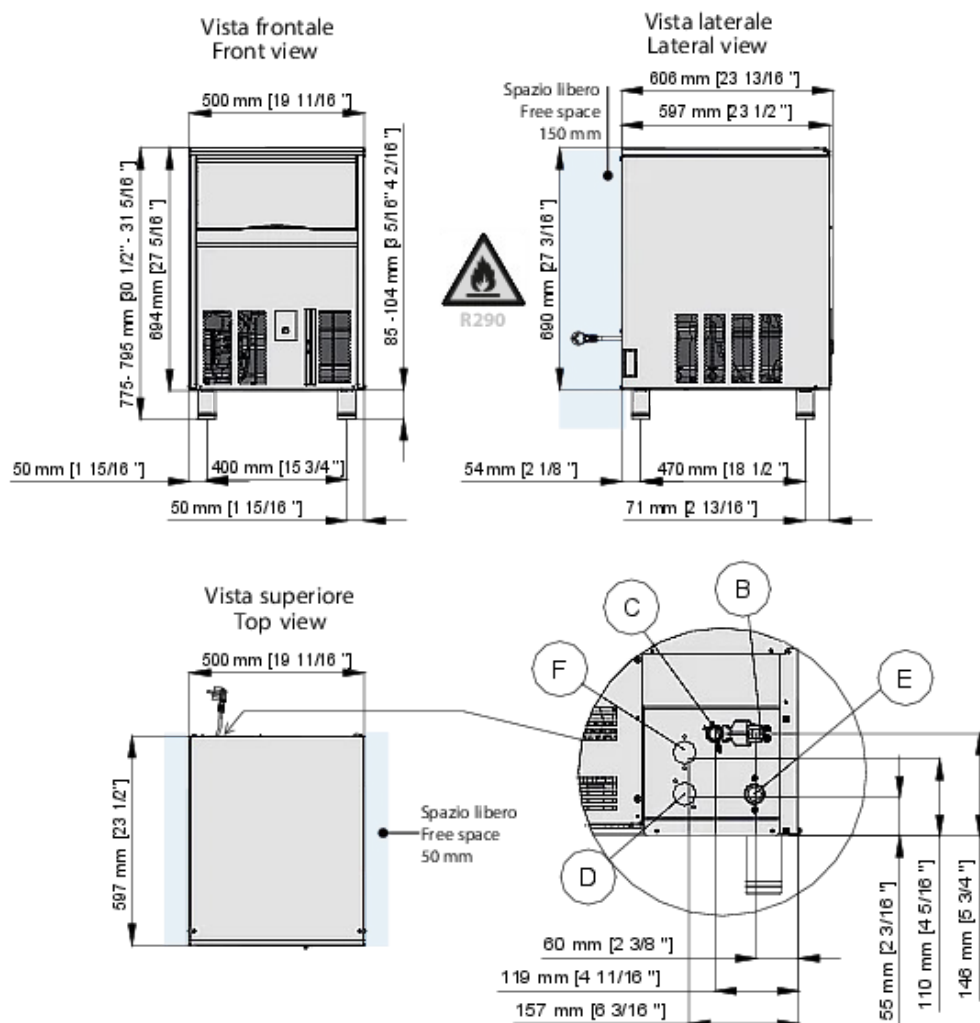

- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G



Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1707 W
Air Volume	300 m³/h