

❄️ 165 kg/ 24h

Granular ice makers / Granular ice makers:
B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B160C ALLGAS
220-240/50/1
Granular ice makers

-  USB
-  PROGRAMMED
OZONE CYCLE
-  SCHEDULED
PRODUCTION
-  TOUCH
CONTROL
-  BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Frontal air intake and exhaust



OPTIONAL

- Programmable sanitizing cycle with ozone

RECOMMENDED DEPOSITS

50 kg

DIMENSIONS

	L x P x H (mm)
	700 x 650 x 995
	760 x 720 x 1070

VOLTAGE

	220-240/50/1 220/60/1
---	--------------------------

GAS

	R290 GWP 3
---	---------------

ICE TYPE

	RESIDUAL WATER CONTENUTO ACQUA
 Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling					
Temp. Aria Air Temp.		Temp. Acqua /Water Temp.			
°C / °F		10° 50°	15° 59°	21° 70°	32° 90°
10° 50°		165 364	158 348	150 331	139 306
21° 70°		156 344	150 331	144 317	134 295
32° 90°		143 315	136 300	130 287	120 264
38° 100°		132 291	126 278	120 264	110 242

Water cooling					
Temp. Aria Air Temp.		Temp. Acqua /Water Temp.			
°C / °F		10° 50°	15° 59°	21° 70°	32° 90°
10° 50°		168 370	164 361	158 348	151 333
21° 70°		162 357	160 353	154 339	146 322
32° 90°		155 342	153 337	148 326	138 304
38° 100°		150 331	148 326	144 317	132 291

TECHNICAL DATA

				 +°C -°C		 W		 W	 21°C 32°C		
				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
B160C	AG	220-240/50/1N			665	610	10	11.3	5.4	65	72
B160C	AG	220-240/50/1N			665	580	10	7.9	59.5	65	72

165 kg/ 24h

Granular ice makers / Granular ice makers:


B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B160C ALLGAS

220-240/50/1


Granular ice makers

DIMENSIONS

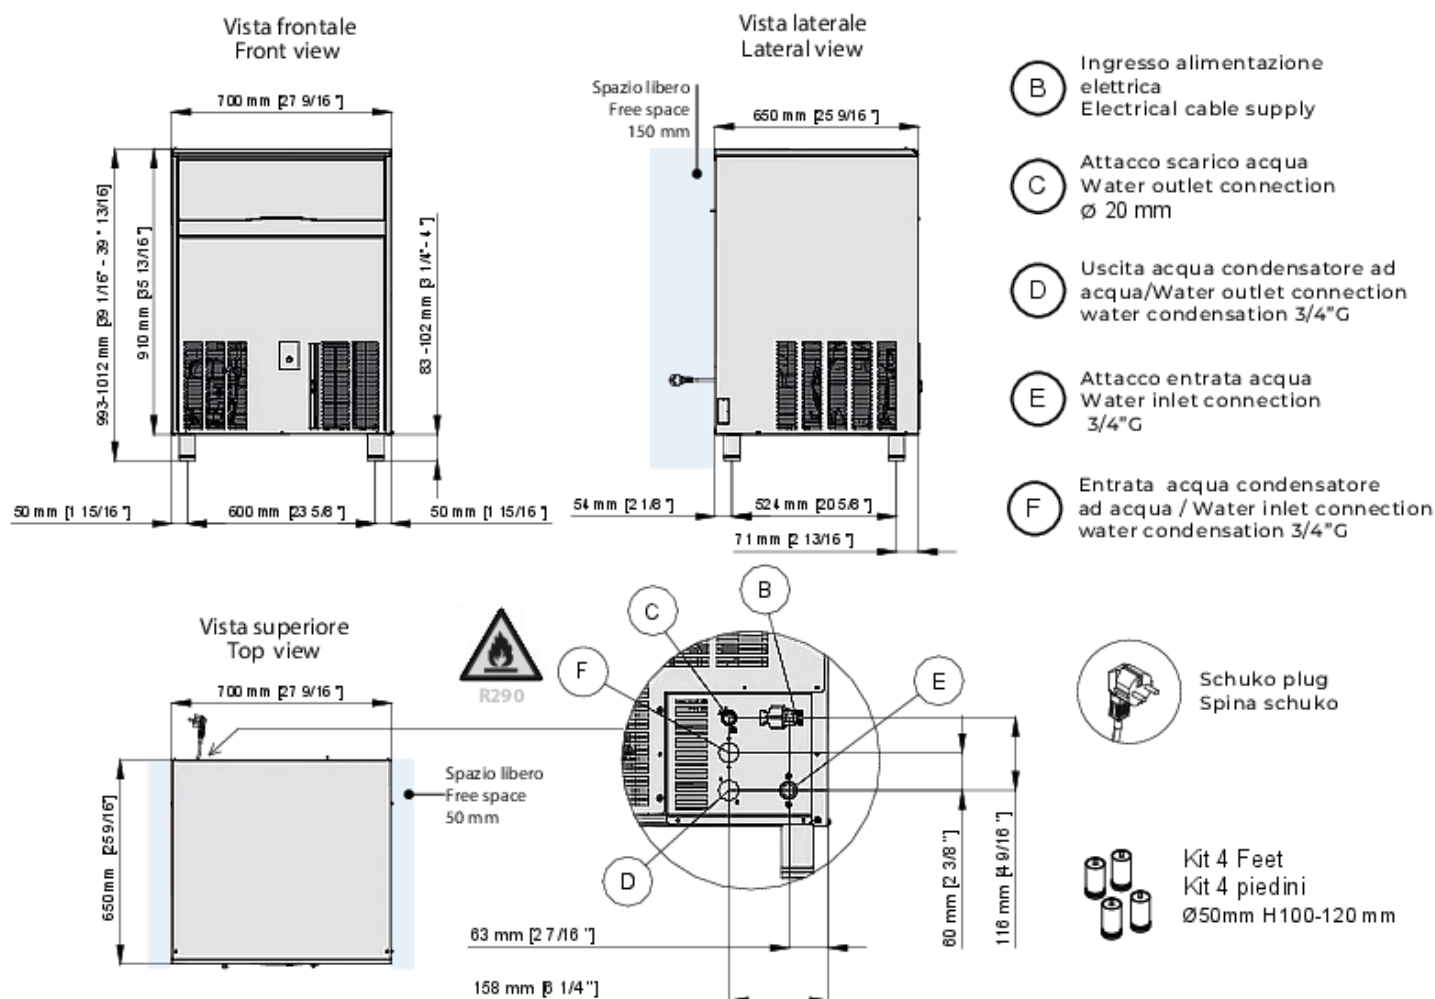

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

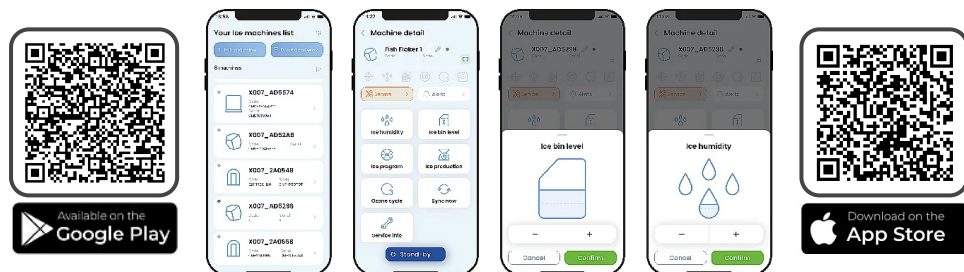

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2218 W
Air Volume	300 m³/h