

❄️ 210 kg/ 24h

Granular ice makers / Granular ice makers:
B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B205 ALLGAS
220-240/50/1
Granular ice makers

-  USB
-  PROGRAMMED OZONE CYCLE
-  SCHEDULED PRODUCTION
-  TOUCH CONTROL
-  BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter



OPTIONAL

- Programmable sanitizing cycle with ozone

RECOMMENDED DEPOSITS

MG105-MG155 (KBD105-155)
MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

	L x P x H (mm)
	570 x 545 x 535
	650 x 600 x 690

VOLTAGE

	220-240/50/1 220/60/1
---	--------------------------

GAS

	R290 GWP 3
---	---------------

ICE TYPE

	RESIDUAL WATER CONTENUTO ACQUA
 Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling					
Temp. Aria Air Temp.		Temp. Acqua /Water Temp.			
°C / °F		10° 50°	15° 59°	21° 70°	32° 90°
10° 50°		210 463	198 436	194 428	180 397
21° 70°		190 419	181 399	174 383	160 353
32° 90°		169 372	162 357	155 342	140 309
38° 100°		160 353	154 339	147 324	133 293

Water cooling					
Temp. Aria Air Temp.		Temp. Acqua /Water Temp.			
°C / °F		10° 50°	15° 59°	21° 70°	32° 90°
10° 50°		195 430	185 408	179 395	162 357
21° 70°		191 421	181 399	175 386	160 353
32° 90°		182 401	175 386	168 370	154 339
38° 100°		167 368	161 355	154 339	140 309

TECHNICAL DATA

												
					cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
B205	AG	220-240/50/1N			878	690	10		10.4	6.5	57	64
B205	AG	220-240/50/1N			878	600	10		6.4	58	57	64

210 kg/ 24h

Granular ice makers / Granular ice makers:


B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B205 ALLGAS

220-240/50/1

Granular ice makers


DIMENSIONS

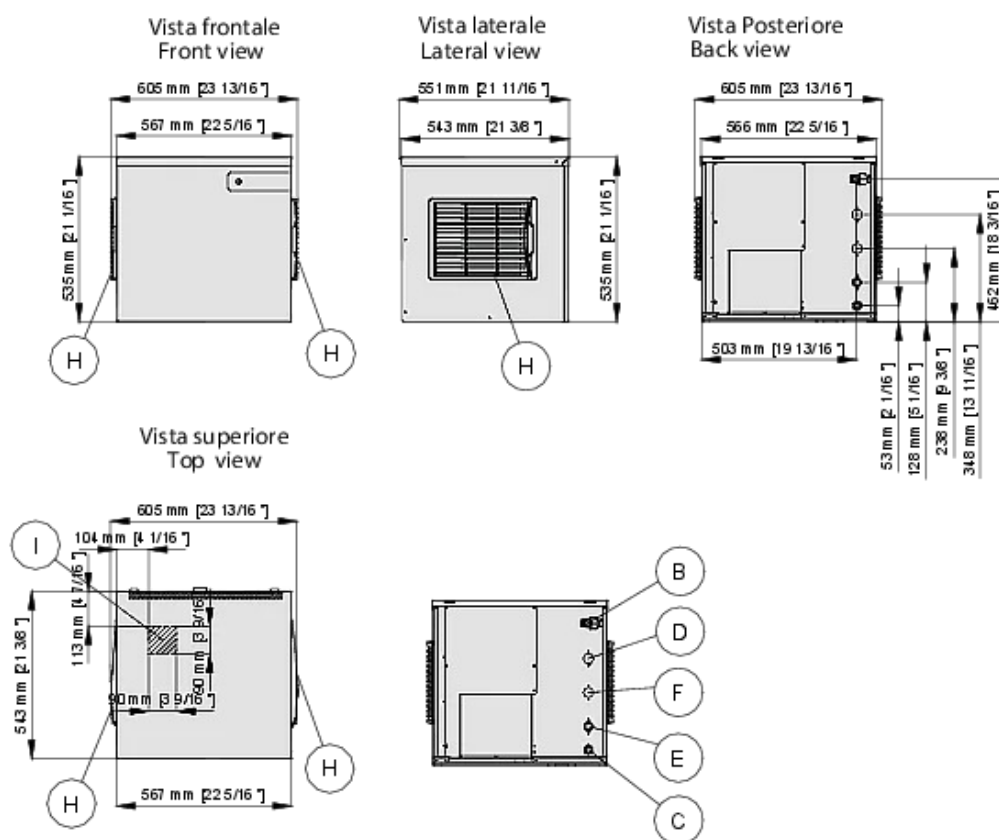

- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G
- H** Filtro aria
Air filter
- I** Foro caduta ghiaccio
Ice drop area

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

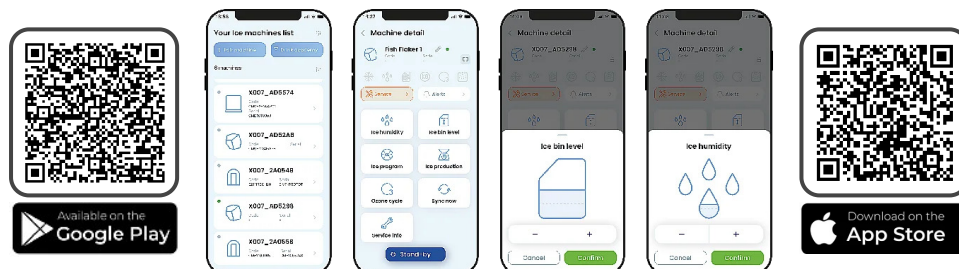

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2905 W
Air Volume	300 m³/h