

28 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C28 + ALL GAS

220-240/50/1

Spray Ice Makers



FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

7,0 kg  
350 pcs

DIMENSIONS

|  | L x P x H (mm)  |
|--|-----------------|
|  | 400 x 480 x 600 |
|  | 460 x 600 x 850 |

VOLTAGE

220-240/50/1  
220/60/1

GAS

R290  
GWP 3

TECHNICAL DATA

|                          |  | cond | comp. W | ABS. W | Fuse | Kwh/100Kg | l / h | Kg | Kg |
|--------------------------|--|------|---------|--------|------|-----------|-------|----|----|
| C28 + A AG 220-240/50/1N |  |      | 653     | 310    | 10   | 36.6      | 2.6   | 35 | 30 |
| C28 + W AG 220-240/50/1N |  |      | 653     | 280    | 10   | 22.8      | 38.7  | 35 | 30 |

ICE TYPE

|                                                  | PCS / CYCLE<br>PZ / CICLO | WEIGHT ICE<br>PESO<br>GHIACCIO |
|--------------------------------------------------|---------------------------|--------------------------------|
| Full Ice Cube<br>20 g -28/28+<br>35 x 37 x 32 mm | 18                        | 20 g                           |

ICE PRODUCTION

kg/24h  
lbs/24h

Air cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 28<br>62                 | 26<br>57   | 24<br>53   | 20<br>44   |
| 21°<br>70°              | 25<br>55                 | 23<br>51   | 22<br>48   | 18<br>40   |
| 32°<br>90°              | 22<br>48                 | 20<br>44   | 19<br>42   | 15<br>33   |
| 38°<br>100°             | 18<br>40                 | 17<br>37   | 16<br>35   | 13<br>29   |

Water cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 28<br>62                 | 26<br>57   | 24<br>53   | 20<br>44   |
| 21°<br>70°              | 27<br>60                 | 25<br>55   | 23<br>51   | 19<br>42   |
| 32°<br>90°              | 26<br>57                 | 24<br>53   | 22<br>48   | 18<br>40   |
| 38°<br>100°             | 21<br>46                 | 20<br>44   | 18<br>40   | 16<br>35   |

 28 kg/ 24h

Spray Ice Makers / Spray Ice Makers:


C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C28 + ALL GAS


220-240/50/1

Spray Ice Makers

## DIMENSIONS

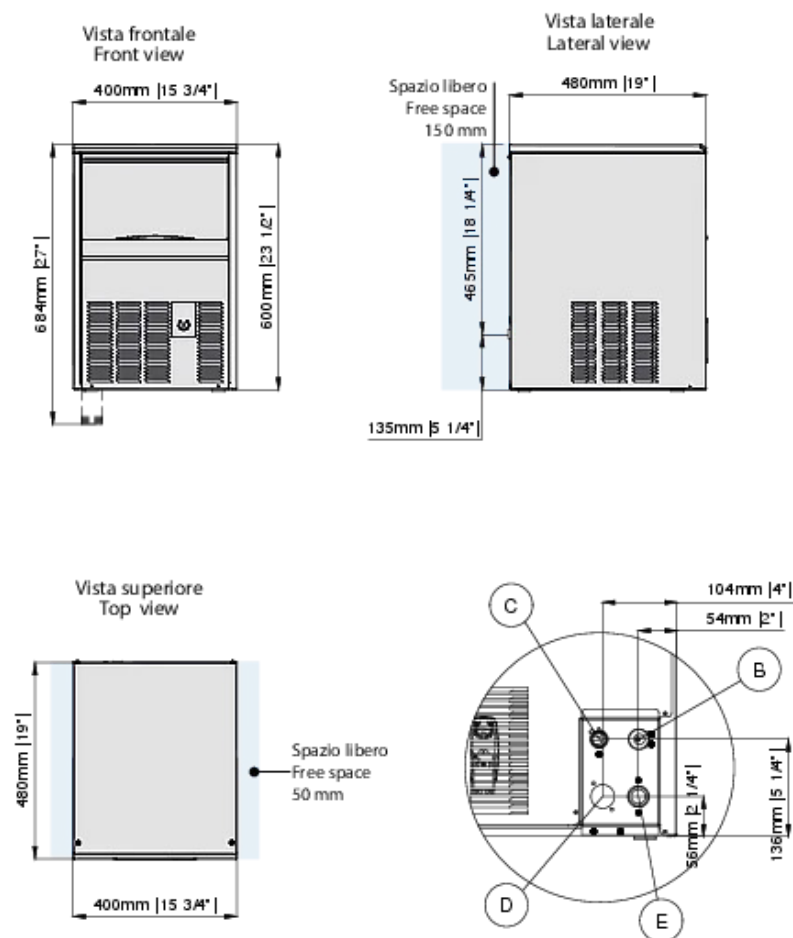

- B** Electrical cable supply  
Ingresso alimentazione elettrica
- C** Water outlet connection  
Attacco scarico acqua Ø 20 mm
- D** Water outlet connection  
water condensation / Uscita acqua condensatore ad acqua Ø 20 mm- 3/4"G
- E** Water inlet connection / Attacco entrata acqua - 3/4"G



Schuko plug  
Spina schuko





Kit 4 Feet  
Kit 4 piedini  
Ø50mm H100-120 mm  
(Opzionali-optional)

## MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the  
Google Play



Download on the  
App Store

## TOUCH CONTROL



### Operating conditions

|                    | Min           | Max             |
|--------------------|---------------|-----------------|
| Temp. Ambient      | 10°C          | 40°C            |
| Temp. Water Ice    | 5°            | 35°             |
| Water Pressure     | 1 Bar (14psi) | 10 Bar (140psi) |
| Conductivity water | 20 microS     | 500 microS      |
| Power Supply       | -10%          | +10%            |

Capacitive Stand-by / Start button  
(LED continuously changing colors from white to red)

|               |          |
|---------------|----------|
| Heat expelled | 947 W    |
| Air Volume    | 185 m³/h |