

 46 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C46 ALL GAS
220-240/50/1
Spray Ice Makers

-  RAINBOW TECHNOLOGY
-  PROGRAMMED OZONE CYCLE
-  SCHEDULED PRODUCTION
-  TOUCH CONTROL
-  SAFE ICE
-  BLUETOOTH
-  USB
-  PUMP

FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

15,0 kg
750 pcs

DIMENSIONS

	L x P x H (mm)
	500 x 540 x 690
	560 x 600 x 850

VOLTAGE

	220-240/50/1 220/60/1
---	--------------------------

GAS

	R290 GWP 3
---	---------------

TECHNICAL DATA

									
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
C46 A AG 220-240/50/1N		1054	480	10	27.9	3.8	38	47	

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	Full Ice Cube 20 g -38/46 35 x 37 x 32 mm	28 20 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	46 101	45 99	41 90	34 75
21° 70°	39 86	38 84	34 75	28 62
32° 90°	37 82	36 79	32 71	26 57
38° 100°	35 77	34 75	30 66	22 48

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	41 90	40 88	36 79	32 71
21° 70°	41 90	40 88	36 79	30 66
32° 90°	40 88	39 86	35 77	29 64
38° 100°	37 82	36 79	32 71	24 53

 46 kg/ 24h

Spray Ice Makers / Spray Ice Makers:





C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C46 ALL GAS

220-240/50/1

Spray Ice Makers

DIMENSIONS

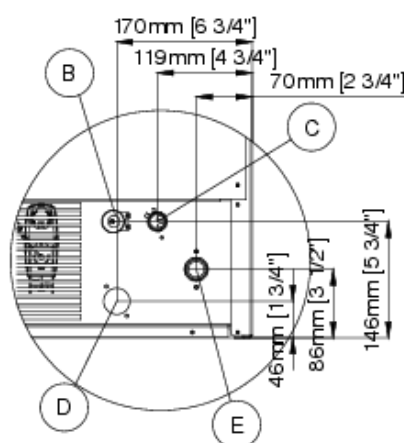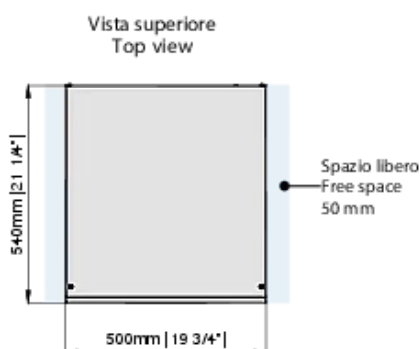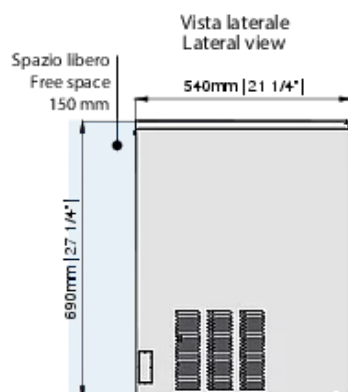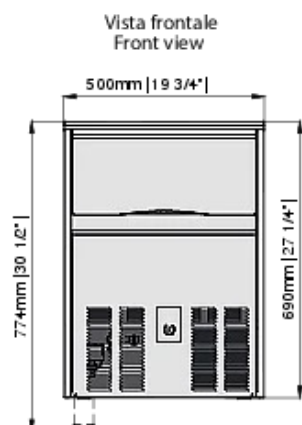

- B** Electrical cable supply
Ingresso alimentazione elettrica
- C** Water outlet connection
Attacco scarico acqua Ø 20 mm
- D** Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm - 3/4"G
- E** Water inlet connection / Attacco
entrata acqua - 3/4"G





Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1537 W
Air Volume	185 m³/h