

54 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C54 ALL GAS

220-240/50/1

Spray Ice Makers

- RAINBOW TECHNOLOGY
- PROGRAMMED OZONE CYCLE
- SCHEDULED PRODUCTION
- TOUCH CONTROL
- SAFE ICE
- USB
- BLUETOOTH
- PUMP

FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

22,0 kg  
1100 pcs

DIMENSIONS

L x P x H (mm)



500 x 580 x 800



560 x 640 x 960

VOLTAGE



220-240/50/1  
220/60/1

GAS



R290  
GWP 3

TECHNICAL DATA

|                        |  |  |  |  |  |  |  |  |  |
|------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                        |                                                                                     | cond                                                                                | comp. W                                                                             | ABS. W                                                                              | Fuse                                                                                | Kwh/100Kg                                                                           | l / h                                                                               | Kg                                                                                  | Kg                                                                                    |
| C54 A AG 220-240/50/1N |  | 1167                                                                                | 520                                                                                 | 10                                                                                  | 23.3                                                                                | 4.5                                                                                 | 42                                                                                  | 50                                                                                  |                                                                                       |

ICE TYPE

|                                                                                     | PCS / CYCLE<br>PZ / CICLO                    | WEIGHT ICE<br>PESO<br>GHIACCIO |
|-------------------------------------------------------------------------------------|----------------------------------------------|--------------------------------|
|  | Full Ice Cube<br>20 g -54<br>35 x 37 x 32 mm | 36 20 g                        |

ICE PRODUCTION

kg/24h  
lbs/24h

Air cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 54<br>119                | 53<br>117  | 49<br>108  | 42<br>93   |
| 21°<br>70°              | 46<br>101                | 45<br>99   | 41<br>90   | 35<br>77   |
| 32°<br>90°              | 43<br>95                 | 42<br>93   | 38<br>84   | 32<br>71   |
| 38°<br>100°             | 39<br>86                 | 38<br>84   | 34<br>75   | 28<br>62   |

Water cooling



| Temp. Aria<br>Air Temp. | Temp. Acqua /Water Temp. |            |            |            |
|-------------------------|--------------------------|------------|------------|------------|
| °C / °F                 | 10°<br>50°               | 15°<br>59° | 21°<br>70° | 32°<br>90° |
| 10°<br>50°              | 54<br>119                | 53<br>117  | 50<br>110  | 48<br>106  |
| 21°<br>70°              | 51<br>112                | 49<br>108  | 47<br>104  | 44<br>97   |
| 32°<br>90°              | 49<br>108                | 47<br>104  | 45<br>99   | 42<br>93   |
| 38°<br>100°             | 47<br>104                | 45<br>99   | 43<br>95   | 40<br>88   |

 54 kg/ 24h

Spray Ice Makers / Spray Ice Makers:


C28 - C28 + - C38 - C38 FL - C38L - C38XL - C46 - C46 FL - C46L - C46XL - C54 - C54 FL - C70 - C70L - C70XL - C90 - C90L - C90XL

C54 ALL GAS

220-240/50/1

Spray Ice Makers

## DIMENSIONS

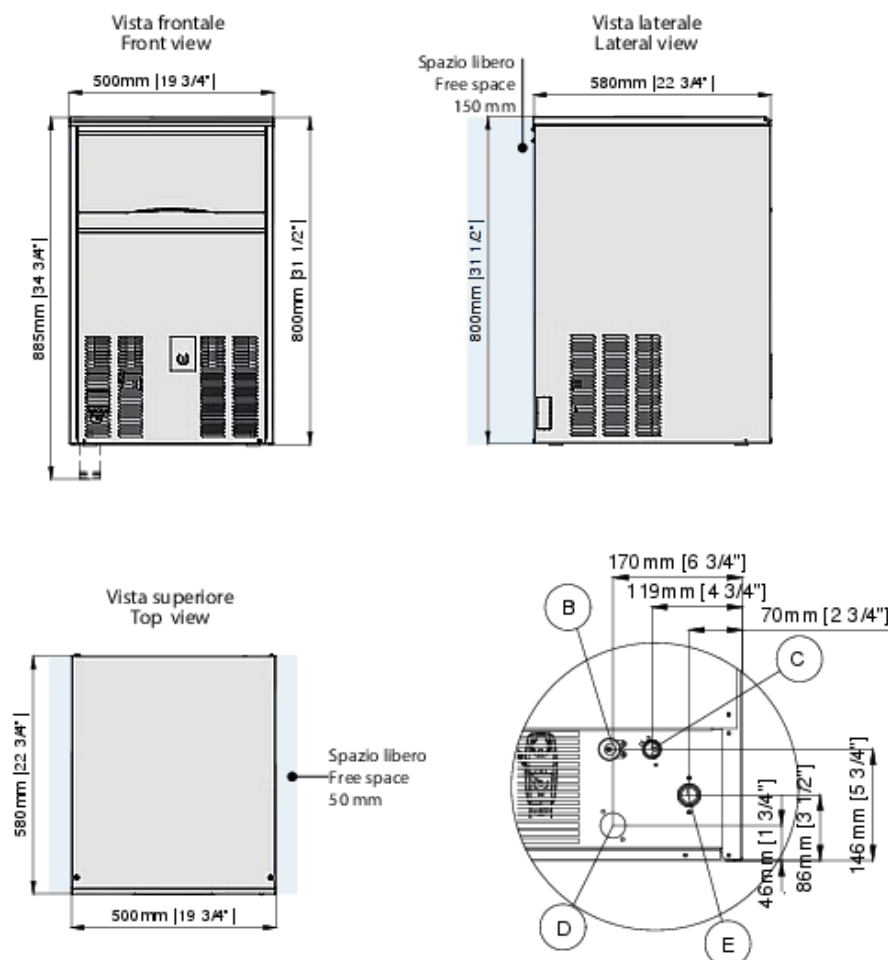


- B** Electrical cable supply  
Ingresso alimentazione elettrica
- C** Water outlet connection  
Attacco scarico acqua Ø 20 mm
- D** Water outlet connection  
water condensation / Uscita acqua condensatore ad acqua Ø 20 mm - 3/4"G
- E** Water inlet connection / Attacco entrata acqua - 3/4"G



Kit 4 Feet  
Kit 4 piedini  
Ø50mm H100-120 mm  
(Opzionali-optional)

## MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

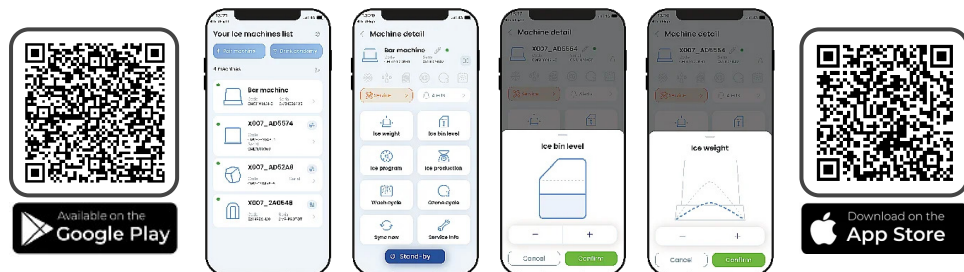

### Operating conditions

|                    | Min           | Max             |
|--------------------|---------------|-----------------|
| Temp. Ambient      | 10°C          | 40°C            |
| Temp. Water Ice    | 5°            | 35°             |
| Water Pressure     | 1 Bar (14psi) | 10 Bar (140psi) |
| Conductivity water | 20 microS     | 500 microS      |
| Power Supply       | -10%          | +10%            |

## TOUCH CONTROL



Capacitive Stand-by / Start button  
(LED continuously changing colors from white to red)

|               |          |
|---------------|----------|
| Heat expelled | 1707 W   |
| Air Volume    | 310 m³/h |