

25 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology
- Feet kit 100mm



ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Hollow Cube 23n-23-25 29 x 32.5 x 41 mm	15	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	25 55	24 53	23 51	21 46
21° 70°	21 46	20 44	19 42	17 37
32° 90°	17 37	16 35	15 33	13 29
38° 100°	14 31	13 29	13 29	11 24

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	24 53	23 51	21 46	19 42
21° 70°	22 48	21 46	20 44	18 40
32° 90°	20 44	19 42	19 42	16 35
38° 100°	19 42	18 40	18 40	16 35

RECOMMENDED DEPOSITS

10kg
476 pcs

DIMENSIONS

L x P x H (mm)



400 x 545 x 690



460 x 600 x 850

VOLTAGE



220-240/50/1
220/60/1

GAS




R290
GWP 3

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
K25 A AG 220-240V/1N/50Hz			354	190	10	24.1	2.23	33	39
K25 W AG 220-240V/1N/50Hz			354	190	10	15.5	26.3	32	38

DIMENSIONS

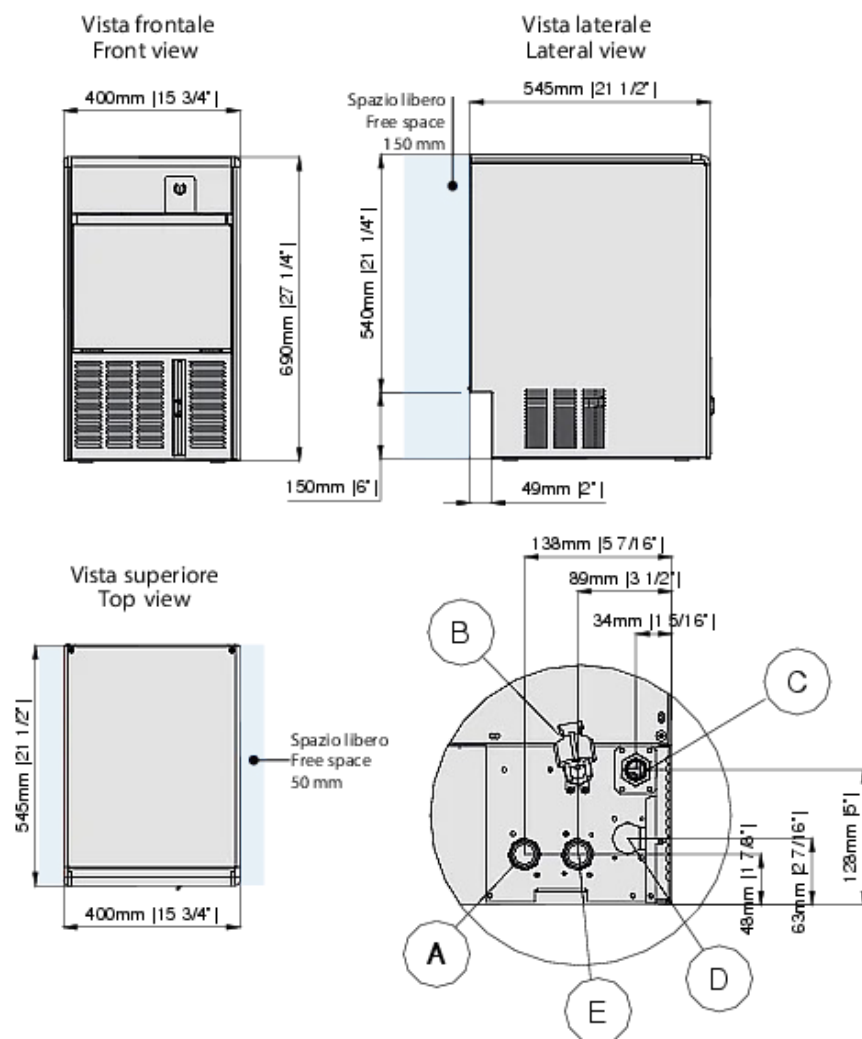

- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G





MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	585 W
Air Volume	300 m³/h