



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

10kg
476 pcs

DIMENSIONS

	L x P x H (mm)
	400 x 545 x 690
	460 x 600 x 850

VOLTAGE

	220-240/50/1 220/60/1
--	--------------------------

GAS

	R290 GWP 3
--	---------------

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Hollow Cube 30-36 29 x 32.5 x 41 mm	20	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	28 62	27 60	25 55	22 48
21° 70°	26 57	24 53	22 48	19 42
32° 90°	22 48	20 44	18 40	15 33
38° 100°	18 40	17 37	15 33	12 26

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	27 60	26 57	25 55	22 48
21° 70°	26 57	25 55	24 53	21 46
32° 90°	25 55	24 53	23 51	20 44
38° 100°	22 48	21 46	20 44	18 40

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
K30 A AG 220-240V/1N/50Hz			354	190	10	21.3	2.47	32	39
K30 W AG 220-240V/1N/50Hz			354	190	10	11.9	37.8	32	39

DIMENSIONS


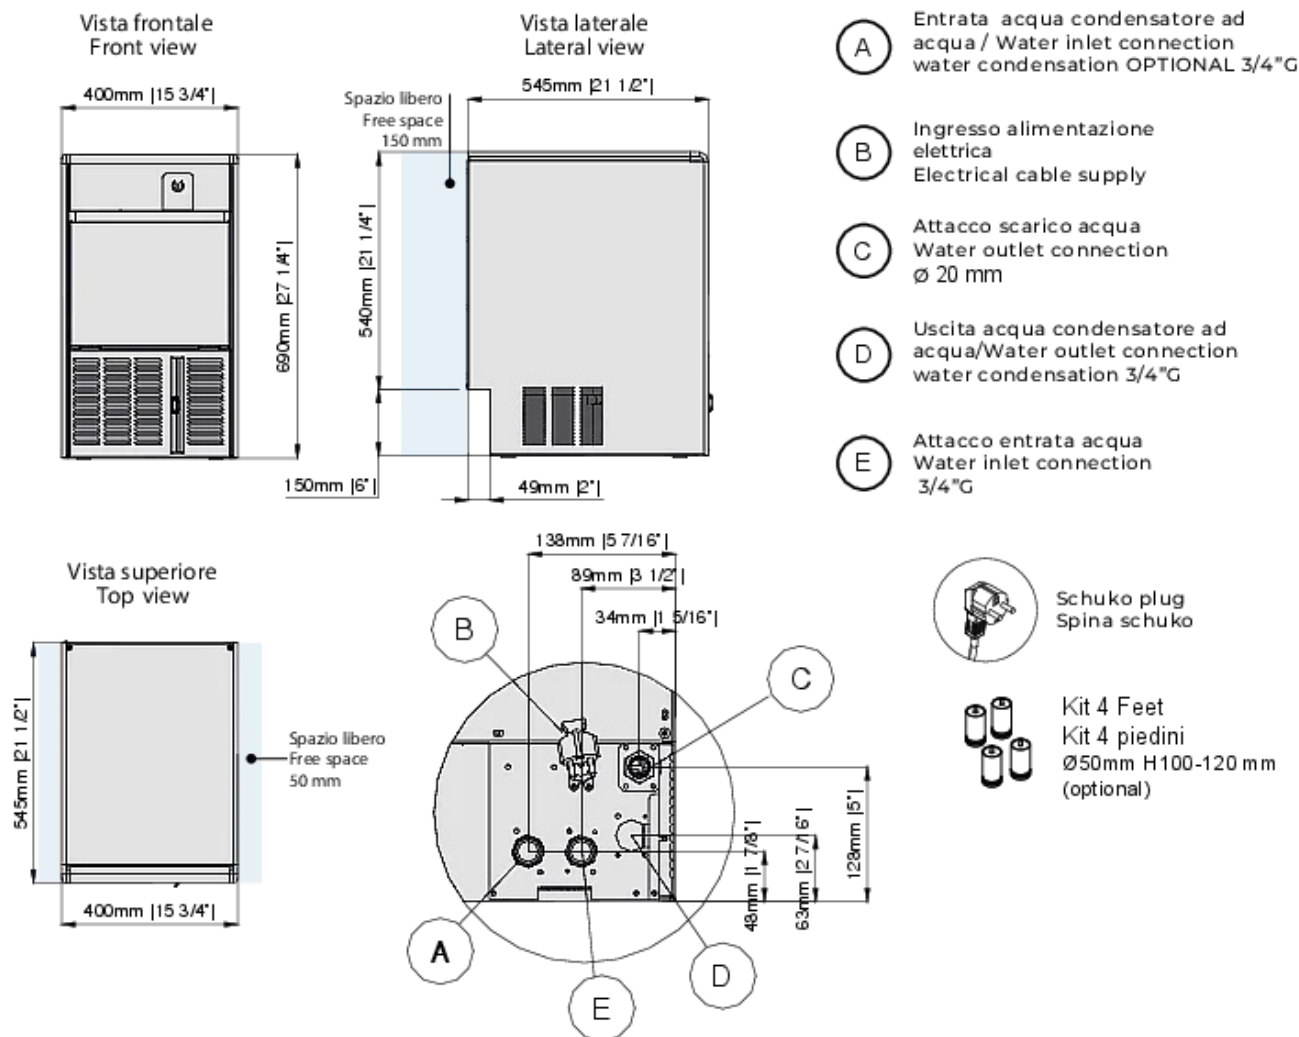


MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the Google Play



Download on the App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	514 W
Air Volume	300 m³/h