

- RAINBOW TECHNOLOGY

USB

PROGRAMMED OZONE CYCLE

SCHEDULED PRODUCTION

TOUCH CONTROL

BLUETOOTH

SAFE ICE

FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology
- Feet kit 100mm



RECOMMENDED DEPOSITS

12 kg
571 pcs

DIMENSIONS

	L x P x H (mm)
	450 x 545 x 690
	510 x 600 x 850

VOLTAGE

	220-240/50/1 220/60/1
---	--------------------------

GAS

	R290 GWP 3
---	---------------

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Hollow Cube 30-36 29 x 32.5 x 41 mm	20	21 g

ICE PRODUCTION


kg/24h
lbs/24h

Air cooling 					
Temp. Aria Air Temp.	Temp. Acqua /Water Temp.				
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°	
10° 50°	36 79	35 77	32 71	29 64	
21° 70°	33 73	32 71	29 64	27 60	
32° 90°	27 60	26 57	25 55	23 51	
38° 100°	25 55	24 53	23 51	21 46	
Water cooling 					
Temp. Aria Air Temp.	Temp. Acqua /Water Temp.				
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°	
10° 50°	36 79	35 77	34 75	30 66	
21° 70°	35 77	34 75	33 73	29 64	
32° 90°	34 75	33 73	32 71	28 62	
38° 100°	31 68	30 66	29 64	26 57	

TECHNICAL DATA

									
	cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg	
K36 A AG 220-240V/1N/50Hz 		585	230	10	17.8	3.75	36	42	
K36 W AG 220-240V/1N/50Hz 		585	200	10	10.3	37.2	37	43	

DIMENSIONS


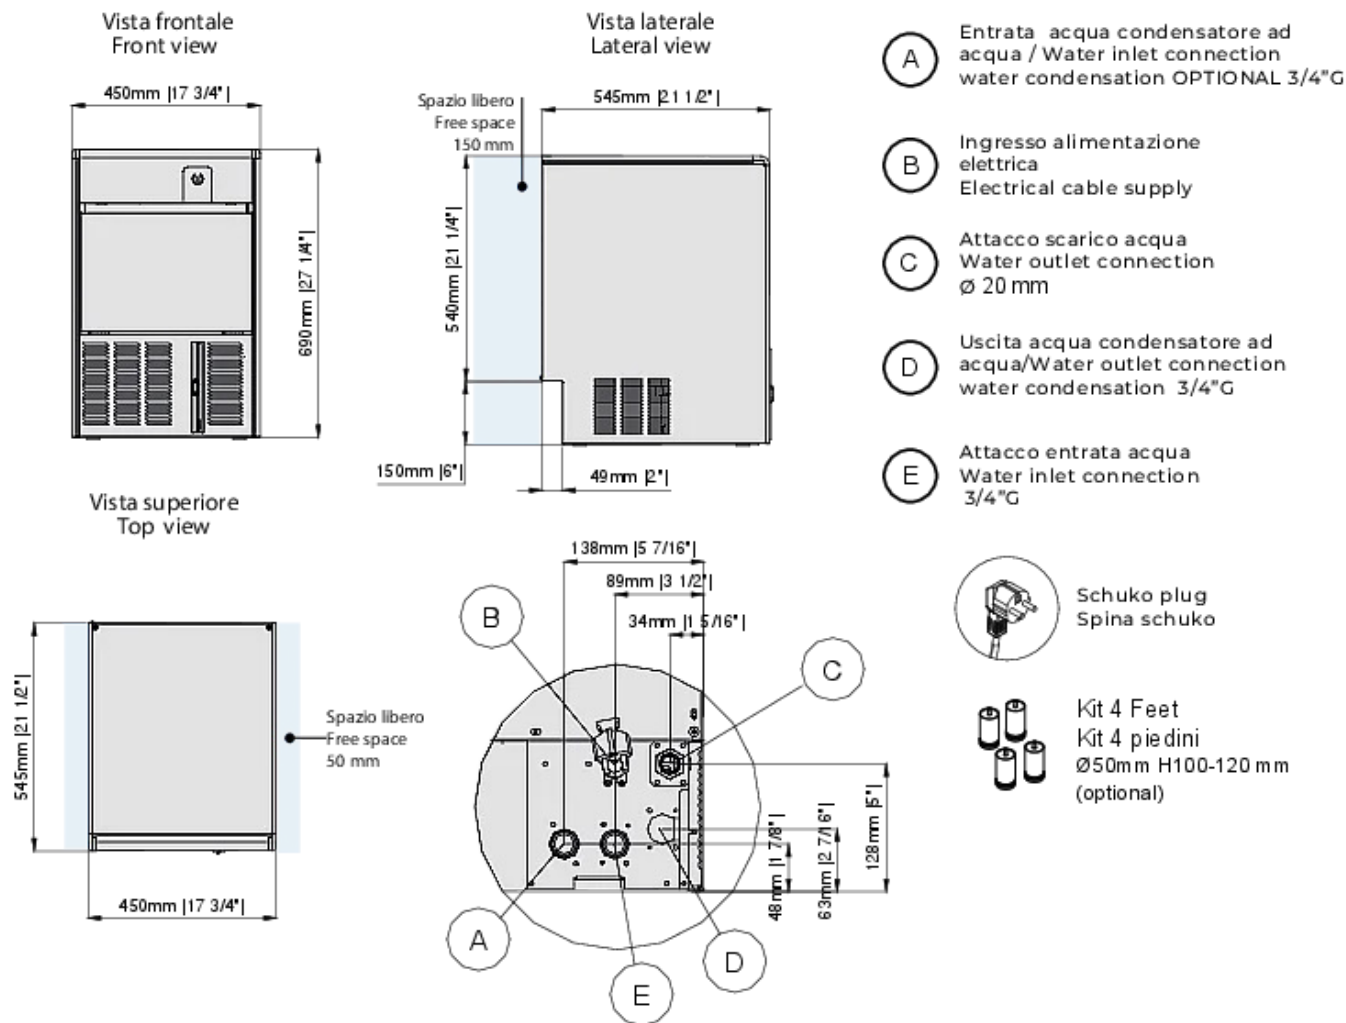


MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the Google Play



Download on the App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	807 W
Air Volume	300 m³/h