

- RAINBOW
TECHNOLOGY

USB

PROGRAMMED
OZONE CYCLE

SCHEDULED
PRODUCTION

TOUCH
CONTROL

BLUETOOTH

SAFE ICE

FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology



RECOMMENDED DEPOSITS

21 kg
1000 pcs

DIMENSIONS

	L x P x H (mm)
	500 x 585 x 956
	560 x 640 x 1050

VOLTAGE

	220-240/50/1 220/60/1
---	--------------------------

GAS

	R290 GWP 3
---	---------------

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Hollow Cube 45-50-62 29 x 32.5 x 41 mm	35	21 g

ICE PRODUCTION

kg/24h
lbs/24h


Air cooling 					
Temp. Aria Air Temp.	Temp. Acqua /Water Temp.				
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°	
10° 50°	50 110	48 105	46 101	43 94	
21° 70°	46 101	45 99	43 94	38 83	
32° 90°	39 85	38 83	37 81	34 74	
38° 100°	34 74	32 70	31 68	28 61	

Water cooling 					
Temp. Aria Air Temp.	Temp. Acqua /Water Temp.				
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°	
10° 50°	50 110	48 106	46 101	43 95	
21° 70°	46 101	45 99	43 95	38 84	
32° 90°	45 99	44 97	42 93	37 82	
38° 100°	42 93	41 90	40 88	34 75	

TECHNICAL DATA

									
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
K50 A AG 220-240V/1N/50Hz		653	310	10	16.4	5.27	51	58	
K50 W AG 220-240V/1N/50Hz		653	280	10	10.8	46.2	51	58	

DIMENSIONS

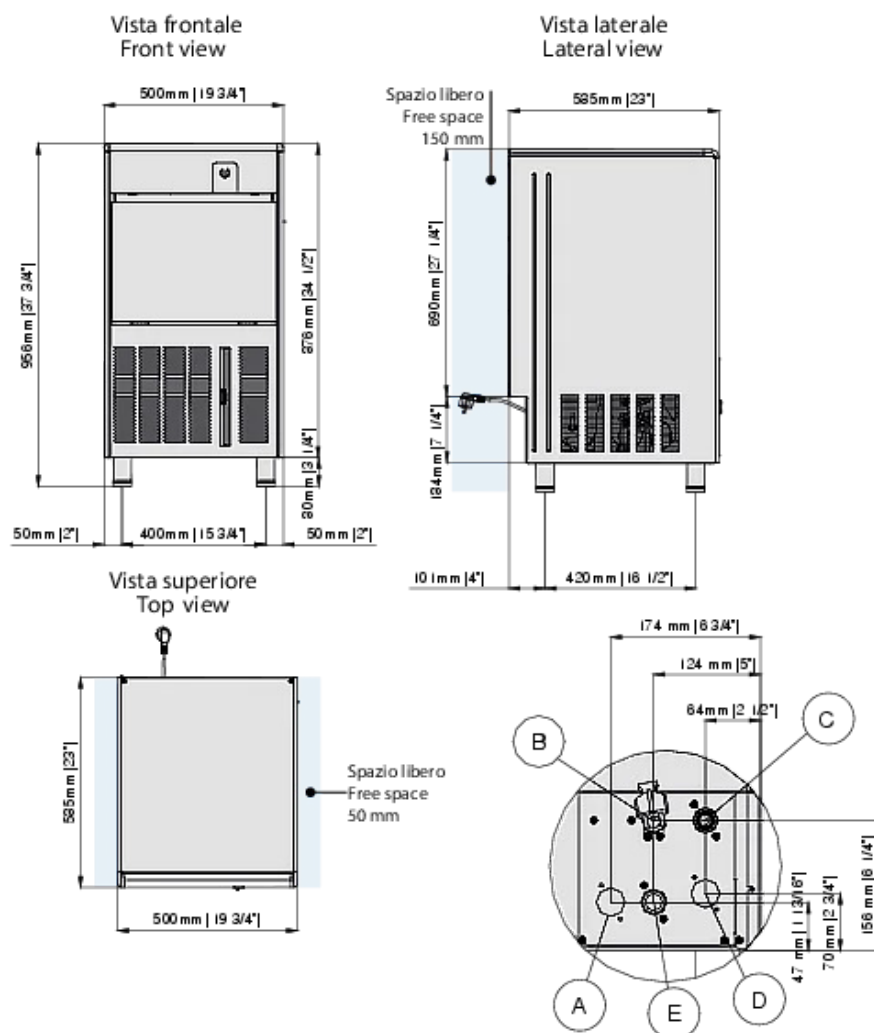

- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G





MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	937 W
Air Volume	500 m³/h