



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology



RECOMMENDED DEPOSITS

28 kg
1333 pcs

DIMENSIONS

L x P x H (mm)



600 x 585 x 956



660 x 640 x 1050

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE	
		PESO GHIACCIO	
 Hollow Cube 45-50-62 29 x 32.5 x 41 mm	35	21 g	

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	62 137	60 132	58 128	53 117
21° 70°	57 126	56 123	54 119	49 108
32° 90°	47 104	46 101	44 97	41 90
38° 100°	39 86	38 84	37 82	35 77

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	66 145	63 139	60 132	55 121
21° 70°	65 143	62 137	59 130	54 119
32° 90°	64 141	61 134	58 128	53 117
38° 100°	61 134	58 128	55 121	50 110

TECHNICAL DATA

											
				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
K62	A AG	220-240V/1N/50Hz		1054	460	10	21.8	6.35	52	60	
K62	W AG	220-240V/1N/50Hz		1054	420	10	12.3	60.8	52	60	




62 kg/ 24h

Palette Ice Makers / Palette Ice Makers:


K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

DIMENSIONS



Vista frontale
Front view

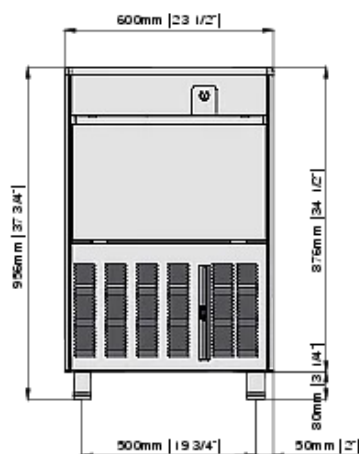

Vista superiore
Top view

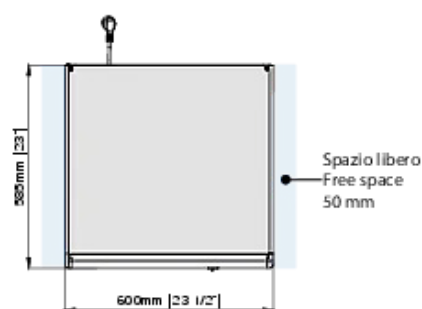

Vista laterale
Lateral view

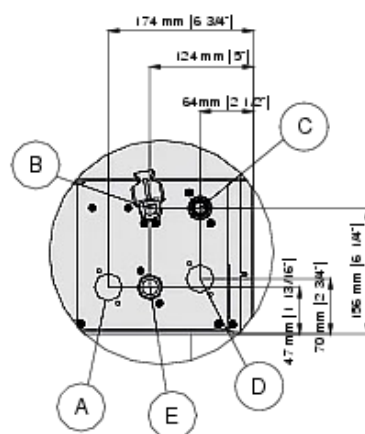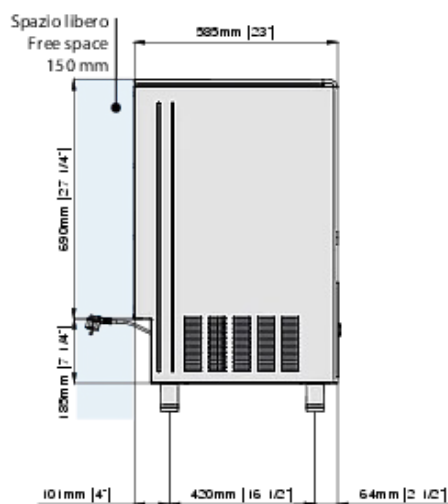

A

Entrata acqua condensatore ad
acqua / Water inlet connection
water condensation OPTIONAL 3/4" G

ⓑ

Ingresso alimentazione elettrica
Electrical cable supply

©

Attacco scarico acqua
Water outlet connection
Ø 20 mm

D

Uscita acqua condensatore ad
acqua/Water outlet connection
water condensation 3/4" G

Ⓔ




Attacco entrata acqua
Water inlet connection
3/4" G



Schuko plug
Spina schuko

MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1537 W
Air Volume	500 m ³ /h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.

+39 0423.738452 Fax +39 0423.722811

email: info@castelmac.it

www.castelmatic.eu - www.icematic.eu