

130 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:

G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G125 ALLGAS

220-240/50/1

Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Side air intake and rear air exhaust
- Ice humidity regulation

OPTIONAL

- Programmable sanitizing cycle with ozone



ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	130 287	125 276	121 267	112 247
21° 70°	120 264	118 260	114 251	105 231
32° 90°	98 216	95 209	91 201	85 187
38° 100°	88 194	86 190	82 181	76 168

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	118 260	115 253	106 234	95 209
21° 70°	112 247	110 242	100 220	90 198
32° 90°	106 234	104 229	94 207	84 185
38° 100°	97 214	96 212	86 190	79 174

RECOMMENDED DEPOSITS

MG105-MG155 (KBD105-155)
MG205-MG255 (KB205-255)
MG305 (KB305)
MG405 (KBM405)
MG505 (KBM505)

DIMENSIONS

L x P x H (mm)



570 x 545 x 535



650 x 600 x 690

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond



comp. W



ABS. W



Fuse



Kwh/100Kg



l / h



Kg



Kg

G125	AG	220-240/50/1N		634	610	10	12.4	3.8	53	60
G125	AG	220-240/50/1N		634	500	10	12.2	40	53	60

 130 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G125 ALLGAS

220-240/50/1

Nugget Ice Makers


DIMENSIONS

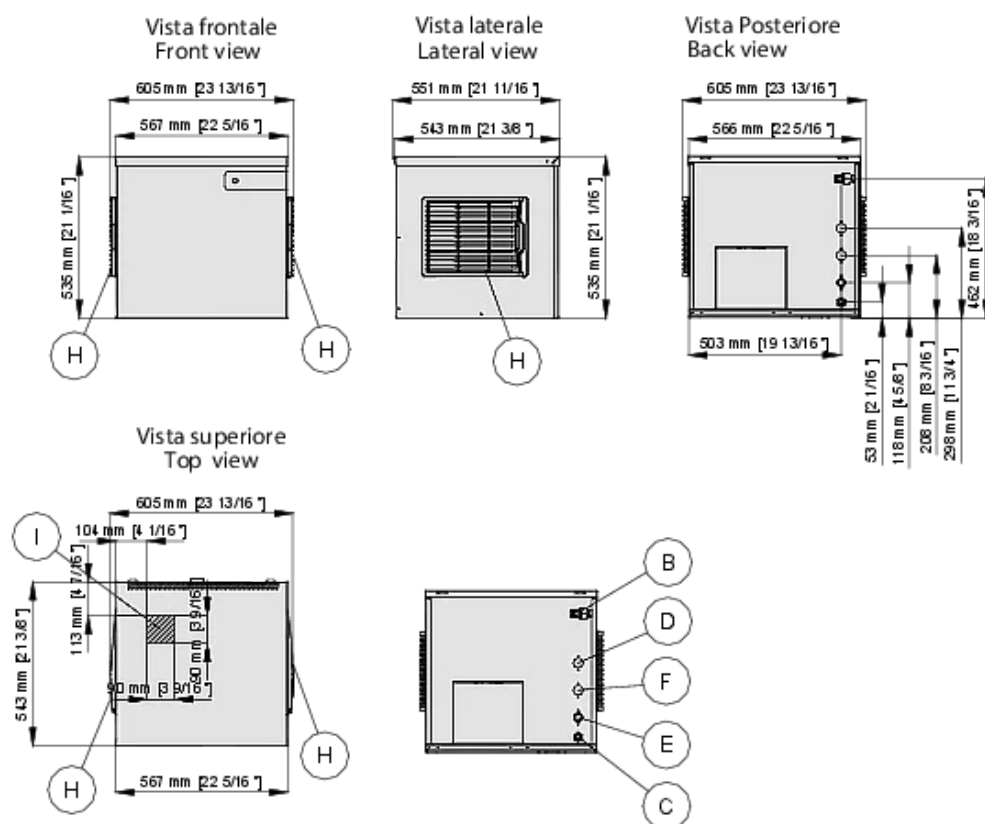

- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G
- H** Filtro aria
Air filter
- I** Foro caduta ghiaccio
Ice drop area

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

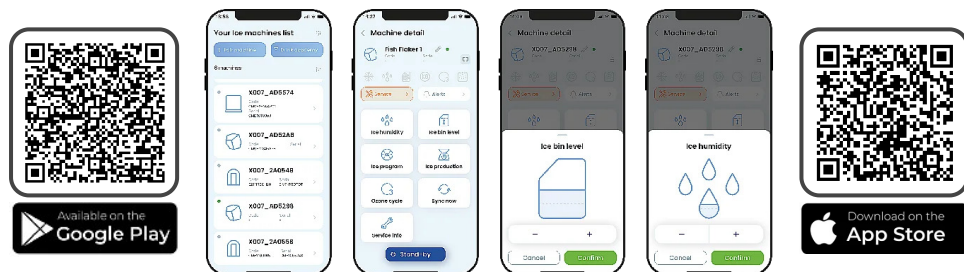

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1707 W
Air Volume	300 m³/h