

- USB
- PROGRAMMED
OZONE CYCLE
- SCHEDULED
PRODUCTION
- TOUCH
CONTROL
- BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Side air intake and rear air exhaust
- Ice humidity regulation

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

MG105-MG155 (KBD105-155)
MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

L x P x H (mm)	
	570 x 545 x 565
	650 x 600 x 710

VOLTAGE

	220-240/50/1 220/60/1
--	--------------------------

GAS

	R290 GWP 3
--	---------------

ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
 Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	165 364	158 348	150 331	139 306
21° 70°	156 344	150 331	144 317	134 295
32° 90°	143 315	136 300	130 287	120 264
38° 100°	132 291	126 278	120 264	110 242

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	177 390	173 381	167 368	160 353
21° 70°	171 377	169 372	164 361	156 344
32° 90°	164 361	162 357	157 346	147 324
38° 100°	159 350	157 346	153 337	141 311

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg	
G165	AG 220-240/50/1N		665	660	10	11.3	5.4	55	62	
G165	AG 220-240/50/1N		665	580	10	7.5	55.8	55	62	

 165 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G165 ALLGAS

220-240/50/1

Nugget Ice Makers



DIMENSIONS

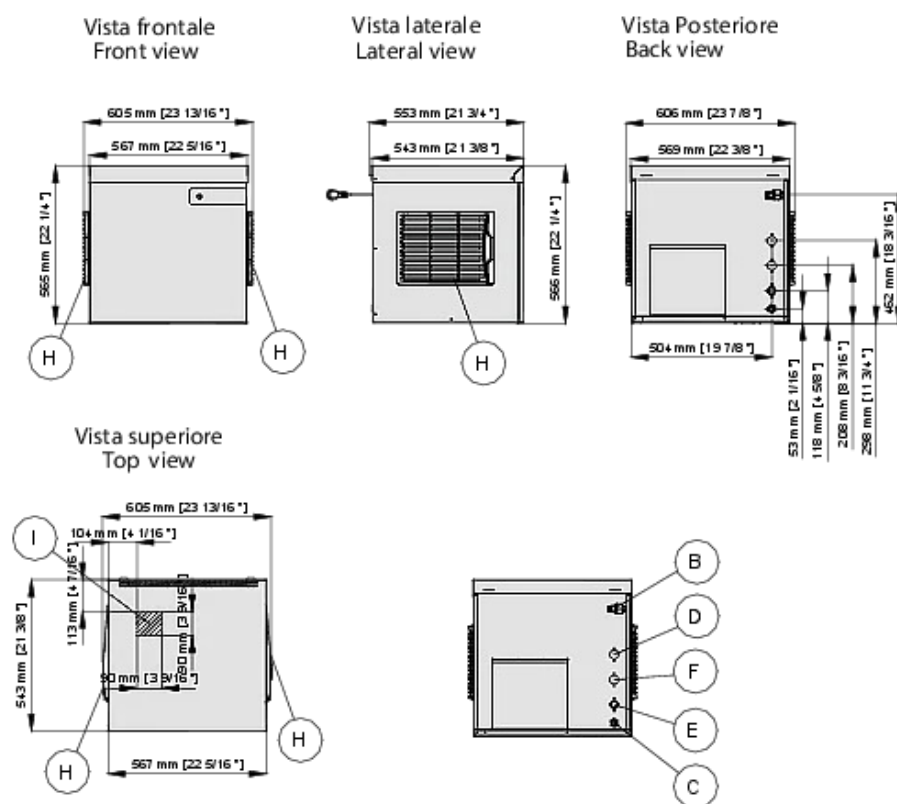

- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G
- H** Filtro aria / Air filter
- I** Foro caduta ghiaccio / Ice drop area

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	2218 W
Air Volume	300 m³/h