

272 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:

G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G305S ALLGAS

220-240/50/1

Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Side air intake and rear air exhaust



ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	272 599	259 571	247 544	221 487
21° 70°	268 591	255 562	242 533	217 478
32° 90°	224 494	212 467	199 439	174 383
38° 100°	213 469	200 441	187 412	162 357

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	240 529	228 503	221 487	200 441
21° 70°	235 518	224 494	216 476	197 434
32° 90°	232 511	218 480	207 456	190 419
38° 100°	220 485	208 458	199 439	182 401

OPTIONAL

- Programmable sanitizing cycle with ozone

RECOMMENDED DEPOSITS

MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

L x P x H (mm)



570 x 545 x 565



650 x 600 x 710

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

Kg

Kg

G305S AG 220-240/50/1N 1388 950 10 10.9 8.4 57 64

G305S AG 220-240/50/1N 1388 880 10 10.1 63.7 57 64

 272 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G305S ALLGAS

220-240/50/1

Nugget Ice Makers



DIMENSIONS

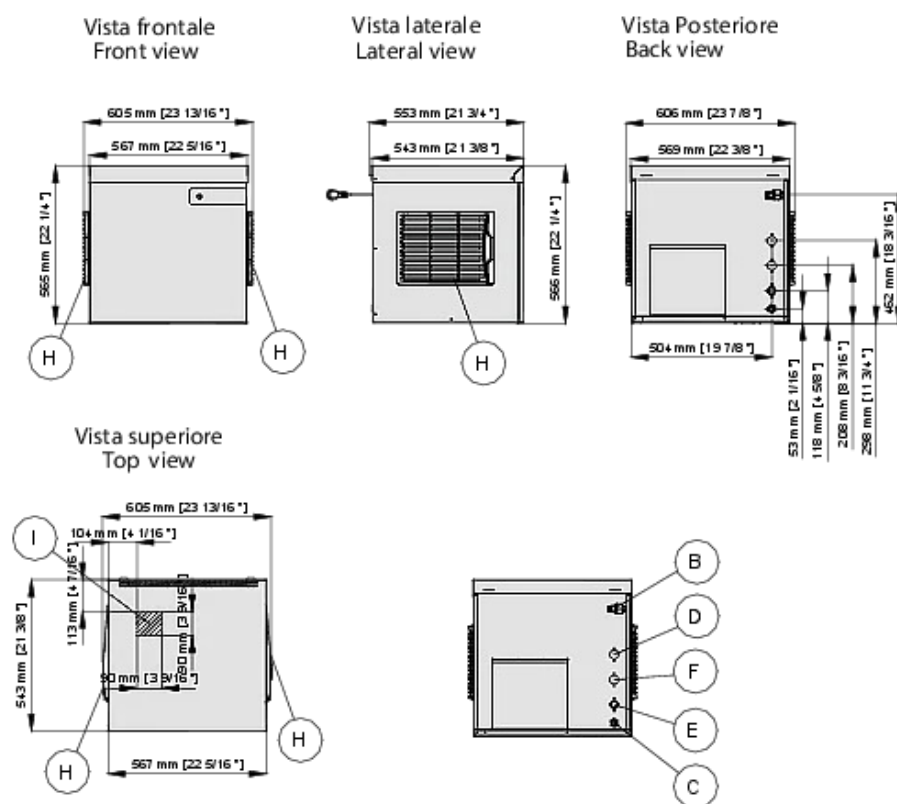

- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G
- H** Filtro aria / Air filter
- I** Foro caduta ghiaccio / Ice drop area

MyICE


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	2594 W
Air Volume	300 m³/h