

 470 kg/ 24h

Granular ice makers / Granular ice makers:
B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B505 ALLGAS
220-240/50/1
Granular ice makers

-  USB
-  PROGRAMMED OZONE CYCLE
-  SCHEDULED PRODUCTION
-  TOUCH CONTROL
-  BLUETOOTH
-  WI-FI

FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter

OPTIONAL

- Sanitization cycle programmable with ozone
- IoT cloud connection



DEPOSIT

MG405(KBM405)
MG505(KBM505)
MB500-700-1000
MC140-320-620

DIMENSIONS

L x P x H (mm)	
	668 x 668 x 709
	750 x 727 x 855

VOLTAGE

	220-240/50/1 400/50/3
---	--------------------------

GAS

	R290 GWP 3
---	---------------

ICE TYPE

RESIDUAL WATER CONTENUTO ACQUA		
	Ghiaccio FLAKER	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	470 1036	444 979	435 959	395 871
21° 70°	440 970	420 926	408 899	360 793
32° 90°	378 833	365 804	350 771	310 683
38° 100°	340 749	328 723	314 692	284 626

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	429 946	407 897	394 868	356 785
21° 70°	420 926	398 877	385 849	352 776
32° 90°	400 882	385 849	370 815	339 747
38° 100°	367 809	354 780	339 747	308 679

TECHNICAL DATA

										
			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
B505	AG	400/50/3N		2778	1650	16	15.7	15.8	103	112
B505	AG	400/50/3N		2778	1500	16	13.8	104.3	103	112
B505	AG	220-240/50/1N		2778	1600	16	15.3	15.6	103	112
B505	AG	220-240/50/1N		2778	1300	16	11.9	110	103	112

470 kg/ 24h

Granular ice makers / Granular ice makers:


B95C - B130C - B160C - B200C - B125 - B165 - B205 - B305S - B405 - B505

B505 ALLGAS

220-240/50/1

Granular ice makers

DIMENSIONS

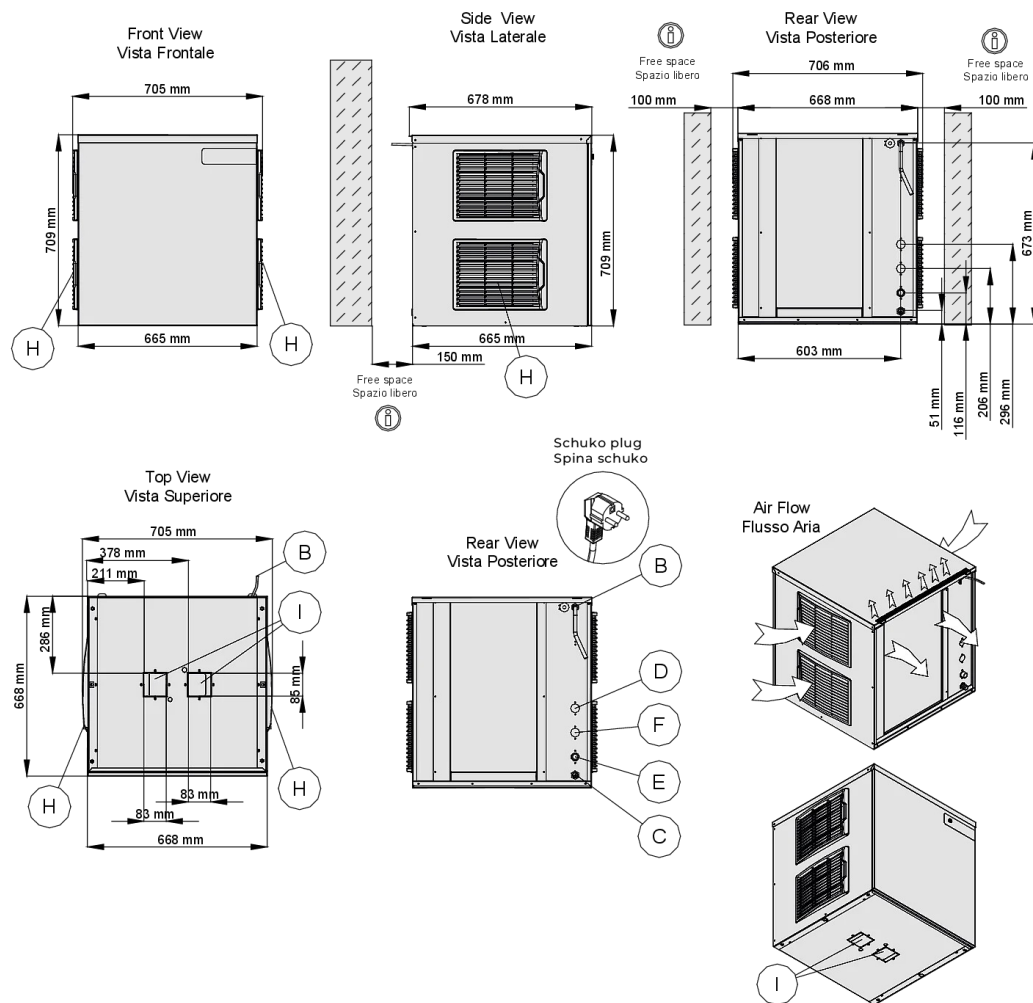



- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G
- H** Filtro aria
Air filter
- I** Foro caduta ghiaccio
Ice drop area

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	4171 W
Air Volume	1200 m³/h