

212 kg/ 24h


Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405 - M505 F

M195 ALLGAS
220-240V/1/50Hz
Modular Ice Maker



FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report



ICE TYPE

		PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	HALF-LARGE-195 10x 24x 29mm	325	6 g
	DICE-195 22x 24x 22mm	204	10 g
	LARGE-195 29x 24x 29mm	130	17 g

OPTIONAL

- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Storage ice level adjustment

DEPOSIT

MG105-MG155-MG205-
MG255(KM205-255)

DIMENSIONS

	L x P x H (mm)
	560 x 620 x 660
	630 x 690 x 810

VOLTAGE

	220-240V/1/50Hz
--	-----------------

GAS

	R290 GWP 3
--	---------------

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	212 467	209 461	205 452	186 410
21° 70°	192 423	189 417	185 408	166 366
32° 90°	157 346	154 339	150 331	132 291
38° 100°	145 320	142 313	138 304	120 264

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	205 452	202 445	193 425	173 381
21° 70°	190 419	184 406	176 388	157 346
32° 90°	187 412	181 399	173 381	155 342
38° 100°	181 399	174 383	164 361	145 320

TECHNICAL DATA


			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
M195	A AG	220-240V/50/1		1661	950	16	12.4	11.9	68	80
M195	W AG	220-240V/50/1		1661	810	16	9.4	95	68	80

212 kg/ 24h

Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405 - M505 F


M195 ALLGAS
220-240V/1/50Hz
Modular Ice Maker

DIMENSIONS

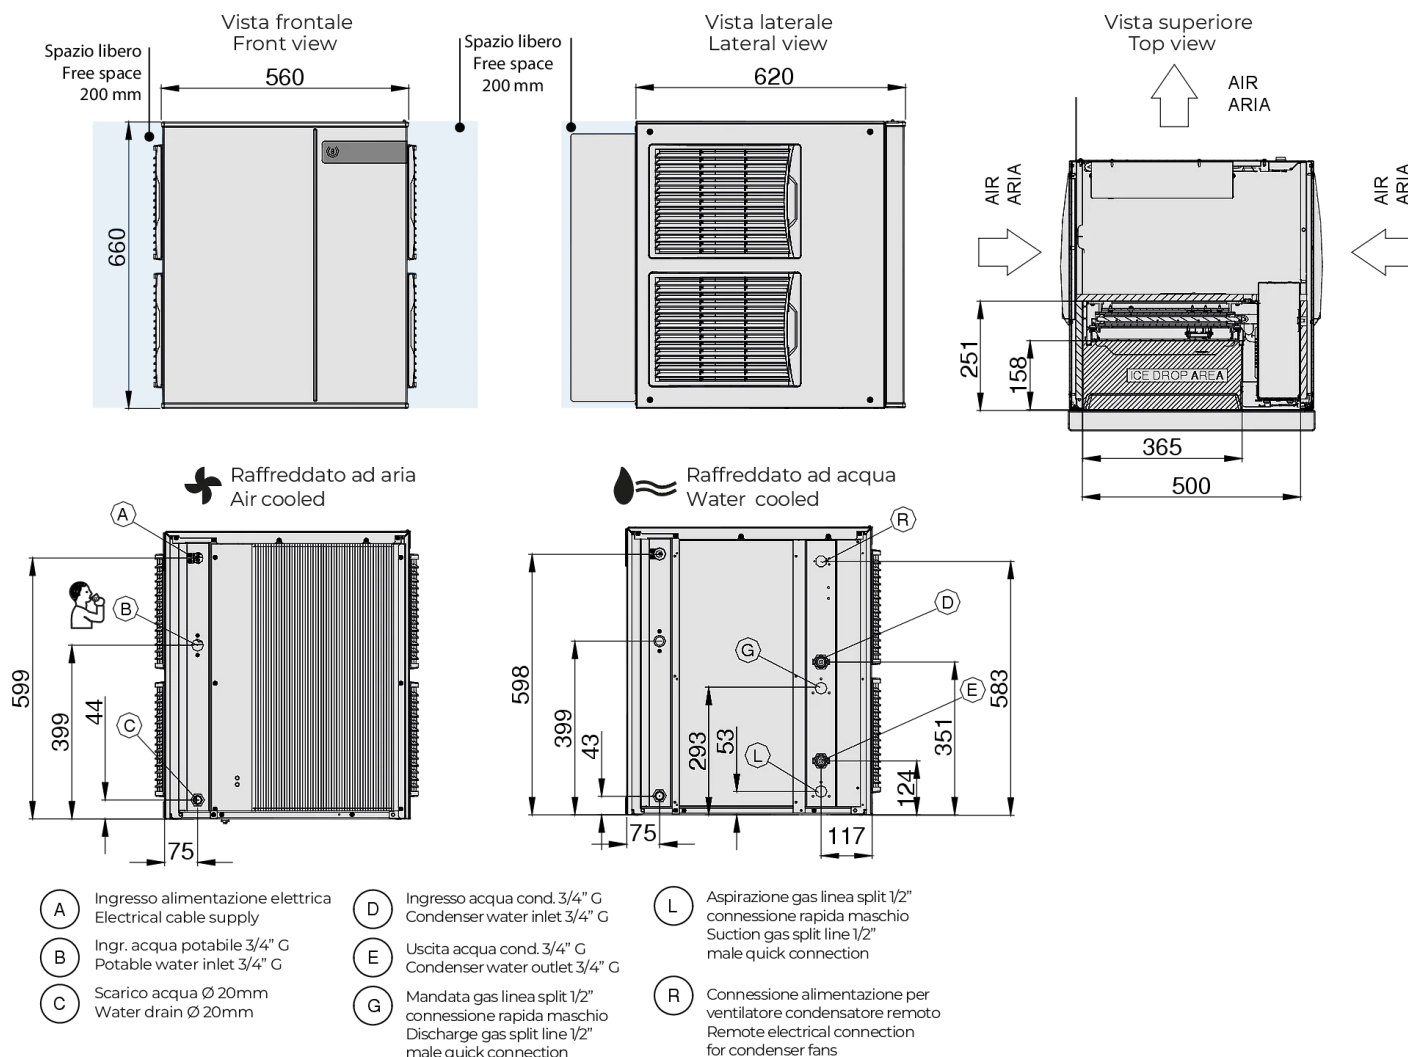


MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

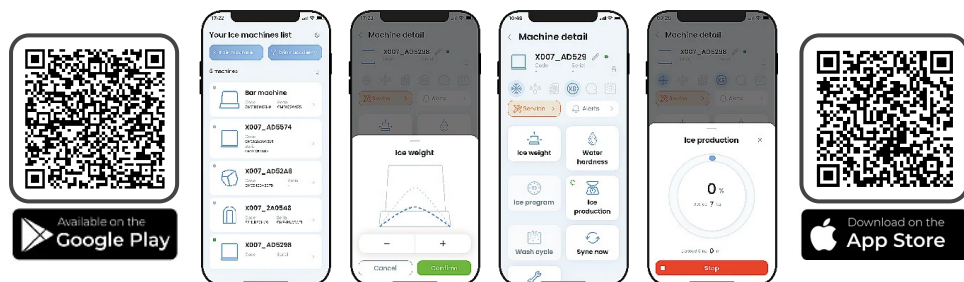

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2560 W
Air Volume	590 m³/h