

 **62 kg/ 24h**

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K62 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

28 kg
1333 pcs

DIMENSIONS

L x P x H (mm)



600 x 585 x 956



660 x 640 x 1050

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO	
 Cubetto CAVO 45-50-62 29x 41x 32.5mm	35	21 g	

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	62 137	60 132	58 128	53 117
21° 70°	57 126	56 123	54 119	49 108
32° 90°	47 104	46 101	44 97	41 90
38° 100°	39 86	38 84	37 82	35 77

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	66 145	63 139	60 132	55 121
21° 70°	65 143	62 137	59 130	54 119
32° 90°	64 141	61 134	58 128	53 117
38° 100°	61 134	58 128	55 121	50 110

TECHNICAL DATA



cond



comp. W



ABS. W



Fuse



Kwh/100Kg



l / h




Kg




Kg

K62	A AG	220-240V/1N/50Hz		1054	460	10	21.8	6.35	52	60
K62	W AG	220-240V/1N/50Hz		1054	420	10	12.3	60.8	52	60

DIMENSIONS

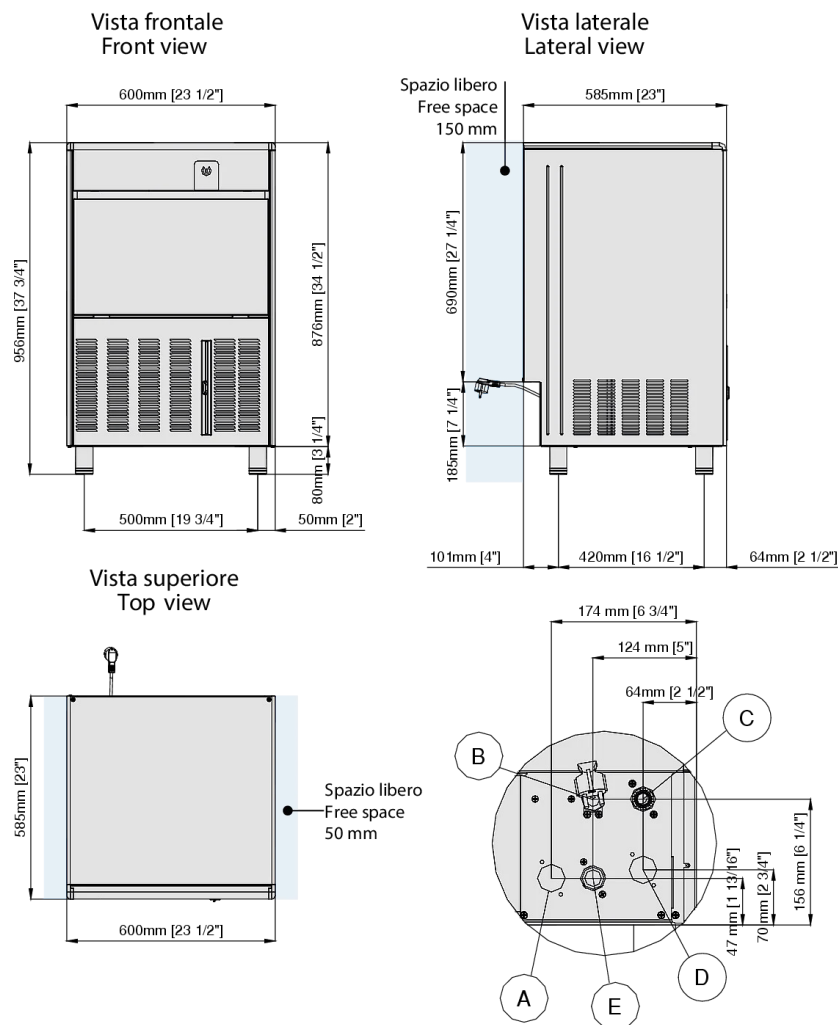



- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation Ø 20 mm
- E** Attacco entrata acqua / Water inlet connection 3/4"G




Schuko plug
Spina schuko

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone



TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1537 W
Air Volume	500 m³/h