

 **98 kg/ 24h**

Palette Ice Makers / Palette Ice Makers:

K 23 - K23n - K25 - K30 - K36 - K45 - K50 - K62 - K80 - K95 - K150

K95 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel casing
- Air or water condensation
- Cleaning cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Sanitization cycle programmable with ozone
- Rainbow technology: Nanotechnological evaporator treatment
- IoT cloud connection
- Feet kit 100mm



DEPOSIT

40 kg
1904 pcs

DIMENSIONS

L x P x H (mm)



800 x 585 x 956



860 x 640 x 1050

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

ICE TYPE

		PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	Cubetto CAVO 80-95 29x 41x 32.5mm	60	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	96 212	94 207	89 196	80 176
21° 70°	88 194	86 190	82 181	75 165
32° 90°	77 170	75 165	72 159	66 145
38° 100°	62 137	60 132	58 128	53 117

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	105 231	100 220	95 209	88 194
21° 70°	103 227	98 216	93 205	86 190
32° 90°	100 220	96 212	91 201	84 185
38° 100°	92 203	90 198	85 187	78 172

TECHNICAL DATA



cond

comp. W

ABS. W

Fuse

Kwh/100Kg


I / h

Kg


Kg

K95	A AG	220-240V/1N/50Hz		1589	600	10	16.8	8.56	66	76
K95	W AG	220-240V/1N/50Hz		1589	580	10	10.3	67.9	66	76

DIMENSIONS

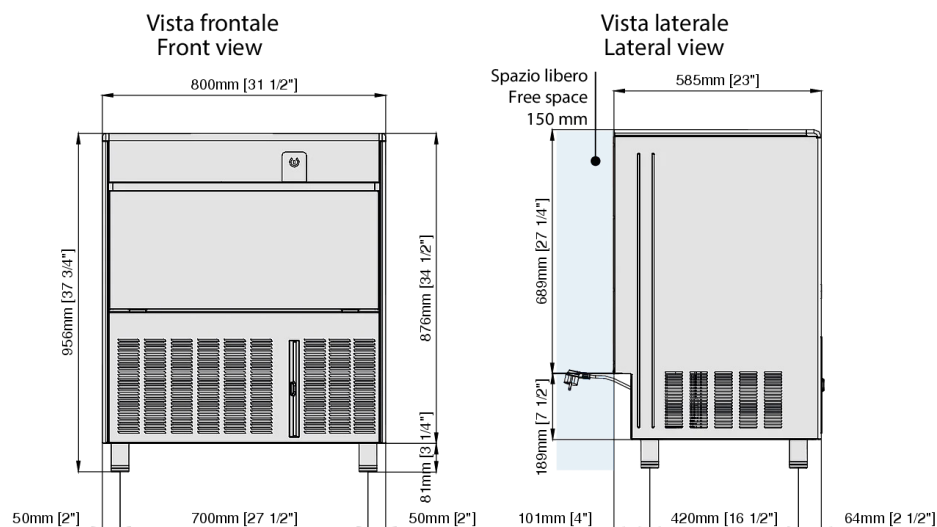

- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection water condensation Ø 20 mm
- E** Attacco entrata acqua
Water inlet connection
3/4"G





Schuko plug
Spina schuko

MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2218 W
Air Volume	500 m³/h