

 **276 kg/ 24h**


Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405 - M505 F

M305 ALLGAS
220-240V/1/50Hz
Modular Ice Maker



FEATURES

- Steel casing
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

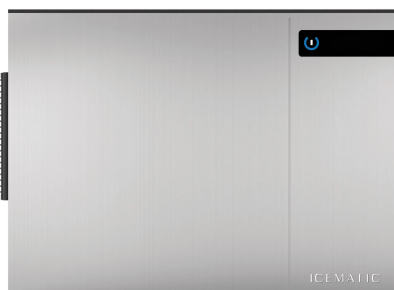

ICE TYPE

		PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	HALF-LARGE-205-305 10x 24x 29mm	370	6 g
	DICE-205-305 22x 24x 22mm	234	10 g
	LARGE-205-305 29x 24x 29mm	140	17 g

OPTIONAL

- Sanitization cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Storage ice level adjustment

DEPOSIT

MG205-MG255-MG305(KM305)
MG405(KFM404)
MG505(KFM505)

DIMENSIONS

	L x P x H (mm)
	760 x 620 x 575
	830 x 690 x 740

VOLTAGE



GAS



ICE PRODUCTION

kg/24h
lbs/24h

Air cooled unit

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10°	276	263	246	216
50°	608	580	542	476
21°	248	239	226	201
70°	547	527	498	443
32°	192	189	184	167
90°	423	417	406	368
38°	165	162	158	150
100°	364	357	348	331

Water cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10°	250	245	240	220
50°	551	540	529	485
21°	239	234	230	210
70°	527	516	507	463
32°	215	210	206	187
90°	474	463	454	412
38°	206	201	197	179
100°	454	443	434	395

TECHNICAL DATA

											
			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg	
M305	A AG	220-240V/50/1		2142	1250	16	14.4	11.6	71	86	
M305	W AG	220-240V/50/1		2142	1080	16	11.8	96.8	71	86	

276 kg/ 24h


Modular Ice Maker / Modular Ice Maker:
M145 - M195 - M205 - M305 - M405 - M505 F

M305 ALLGAS

220-240V/1/50Hz


Modular Ice Maker

DIMENSIONS

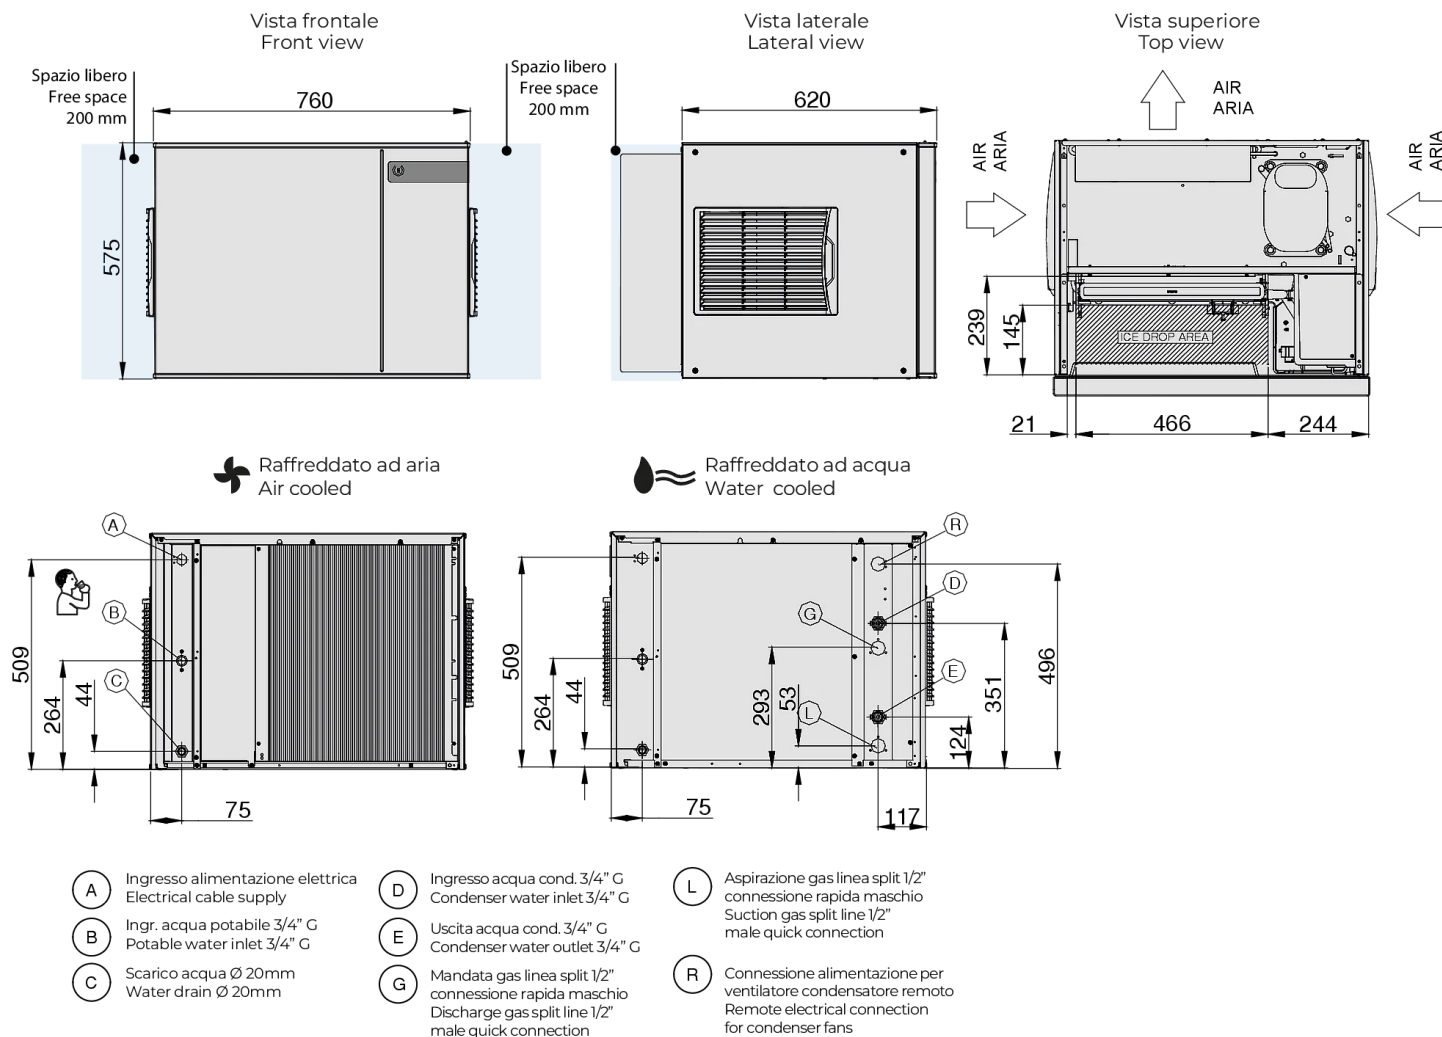


MyICE

Allow control and monitoring of ice makers directly from smartphone / Allow control and monitoring of ice makers directly from smartphone

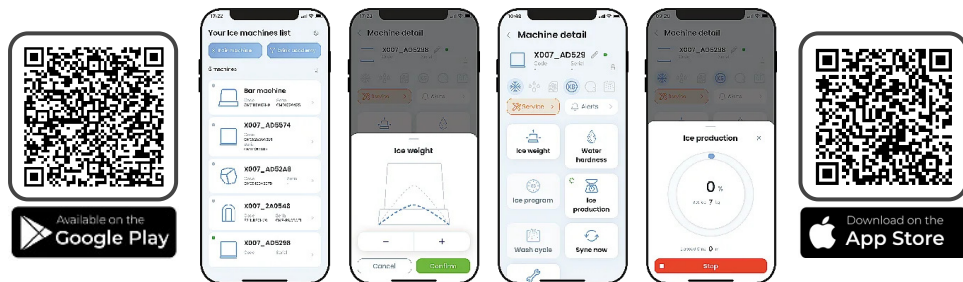

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Press. Water	1 Bar (14psi)	10 Bar (140psi)
Conducib.water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	3242 W
Air Volume	590 m³/h