

90 kg/24h

Nugget Ice Makers / Nugget Ice Makers:

G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G95C ALLGAS

220-240/50/1

Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Removable and washable air filter
- Frontal air intake and exhaust
- Storage ice level adjustment
- Ice humidity regulation

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

18 kg

DIMENSIONS

L x P x H (mm)



500 x 597 x 694



560 x 650 x 970

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA

				cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg
G95C	AG	220-240/50/1N			346	410	10	16	2.5	48	55
G95C	AG	220-240/50/1N			346	360	10	11	36	48	55

ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	90 198	88 194	84 185	76 168
21° 70°	77 170	75 165	71 156	64 141
32° 90°	64 141	62 137	58 128	50 110
38° 100°	58 128	56 123	54 119	48 106

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	84 185	82 181	78 172	70 154
21° 70°	80 176	78 172	73 161	66 145
32° 90°	76 168	74 163	70 154	62 137
38° 100°	70 154	68 150	65 143	58 128

 90 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:


G95C - G130C - G160C - G200C - G125 - G165 - G205 - G305S - G405 - G505

G95C ALLGAS

220-240/50/1

Nugget Ice Makers

DIMENSIONS

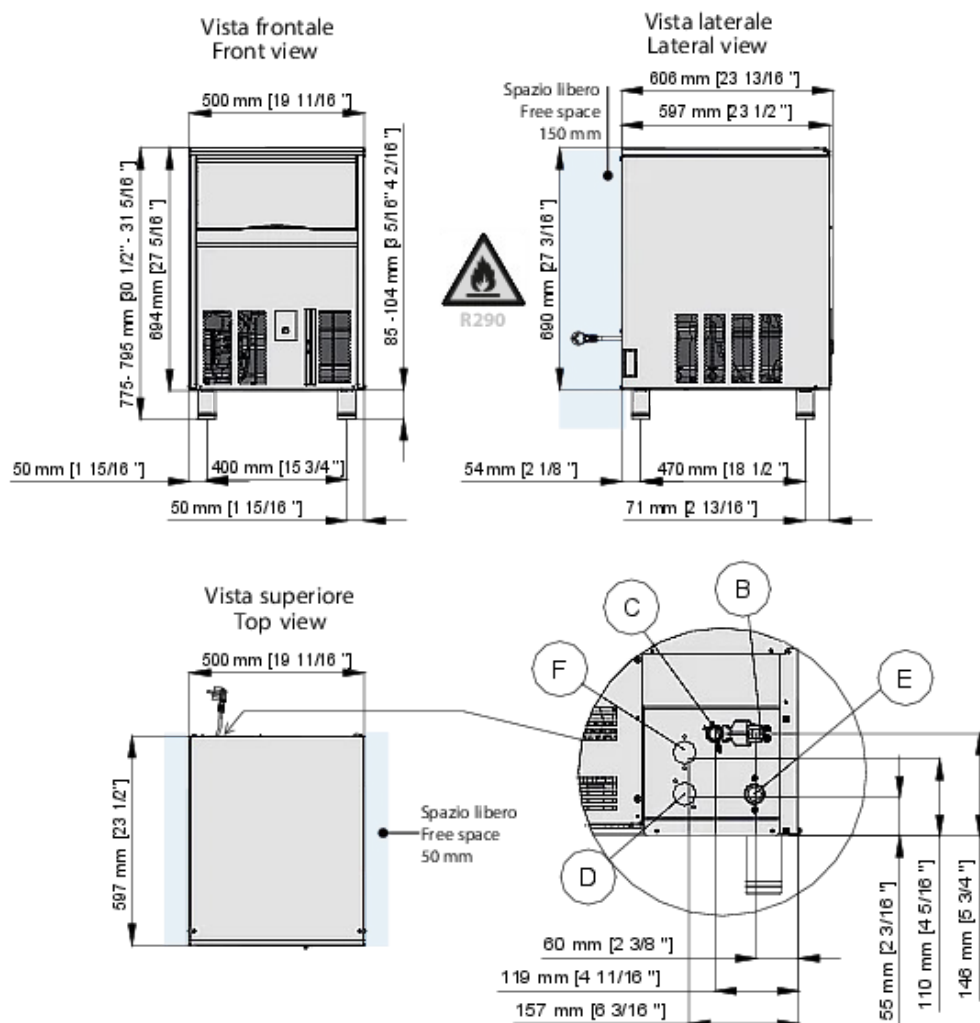

- B** Ingresso alimentazione elettrica
Electrical cable supply
- C** Attacco scarico acqua
Water outlet connection
Ø 20 mm
- D** Uscita acqua condensatore ad acqua/Water outlet connection
water condensation 3/4"G
- E** Attacco entrata acqua
Water inlet connection
3/4"G
- F** Entrata acqua condensatore ad acqua / Water inlet connection
water condensation 3/4"G



Schuko plug
Spina schuko




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

MyICE

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones




Available on the
Google Play



Download on the
App Store

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	985 W
Air Volume	300 m³/h